


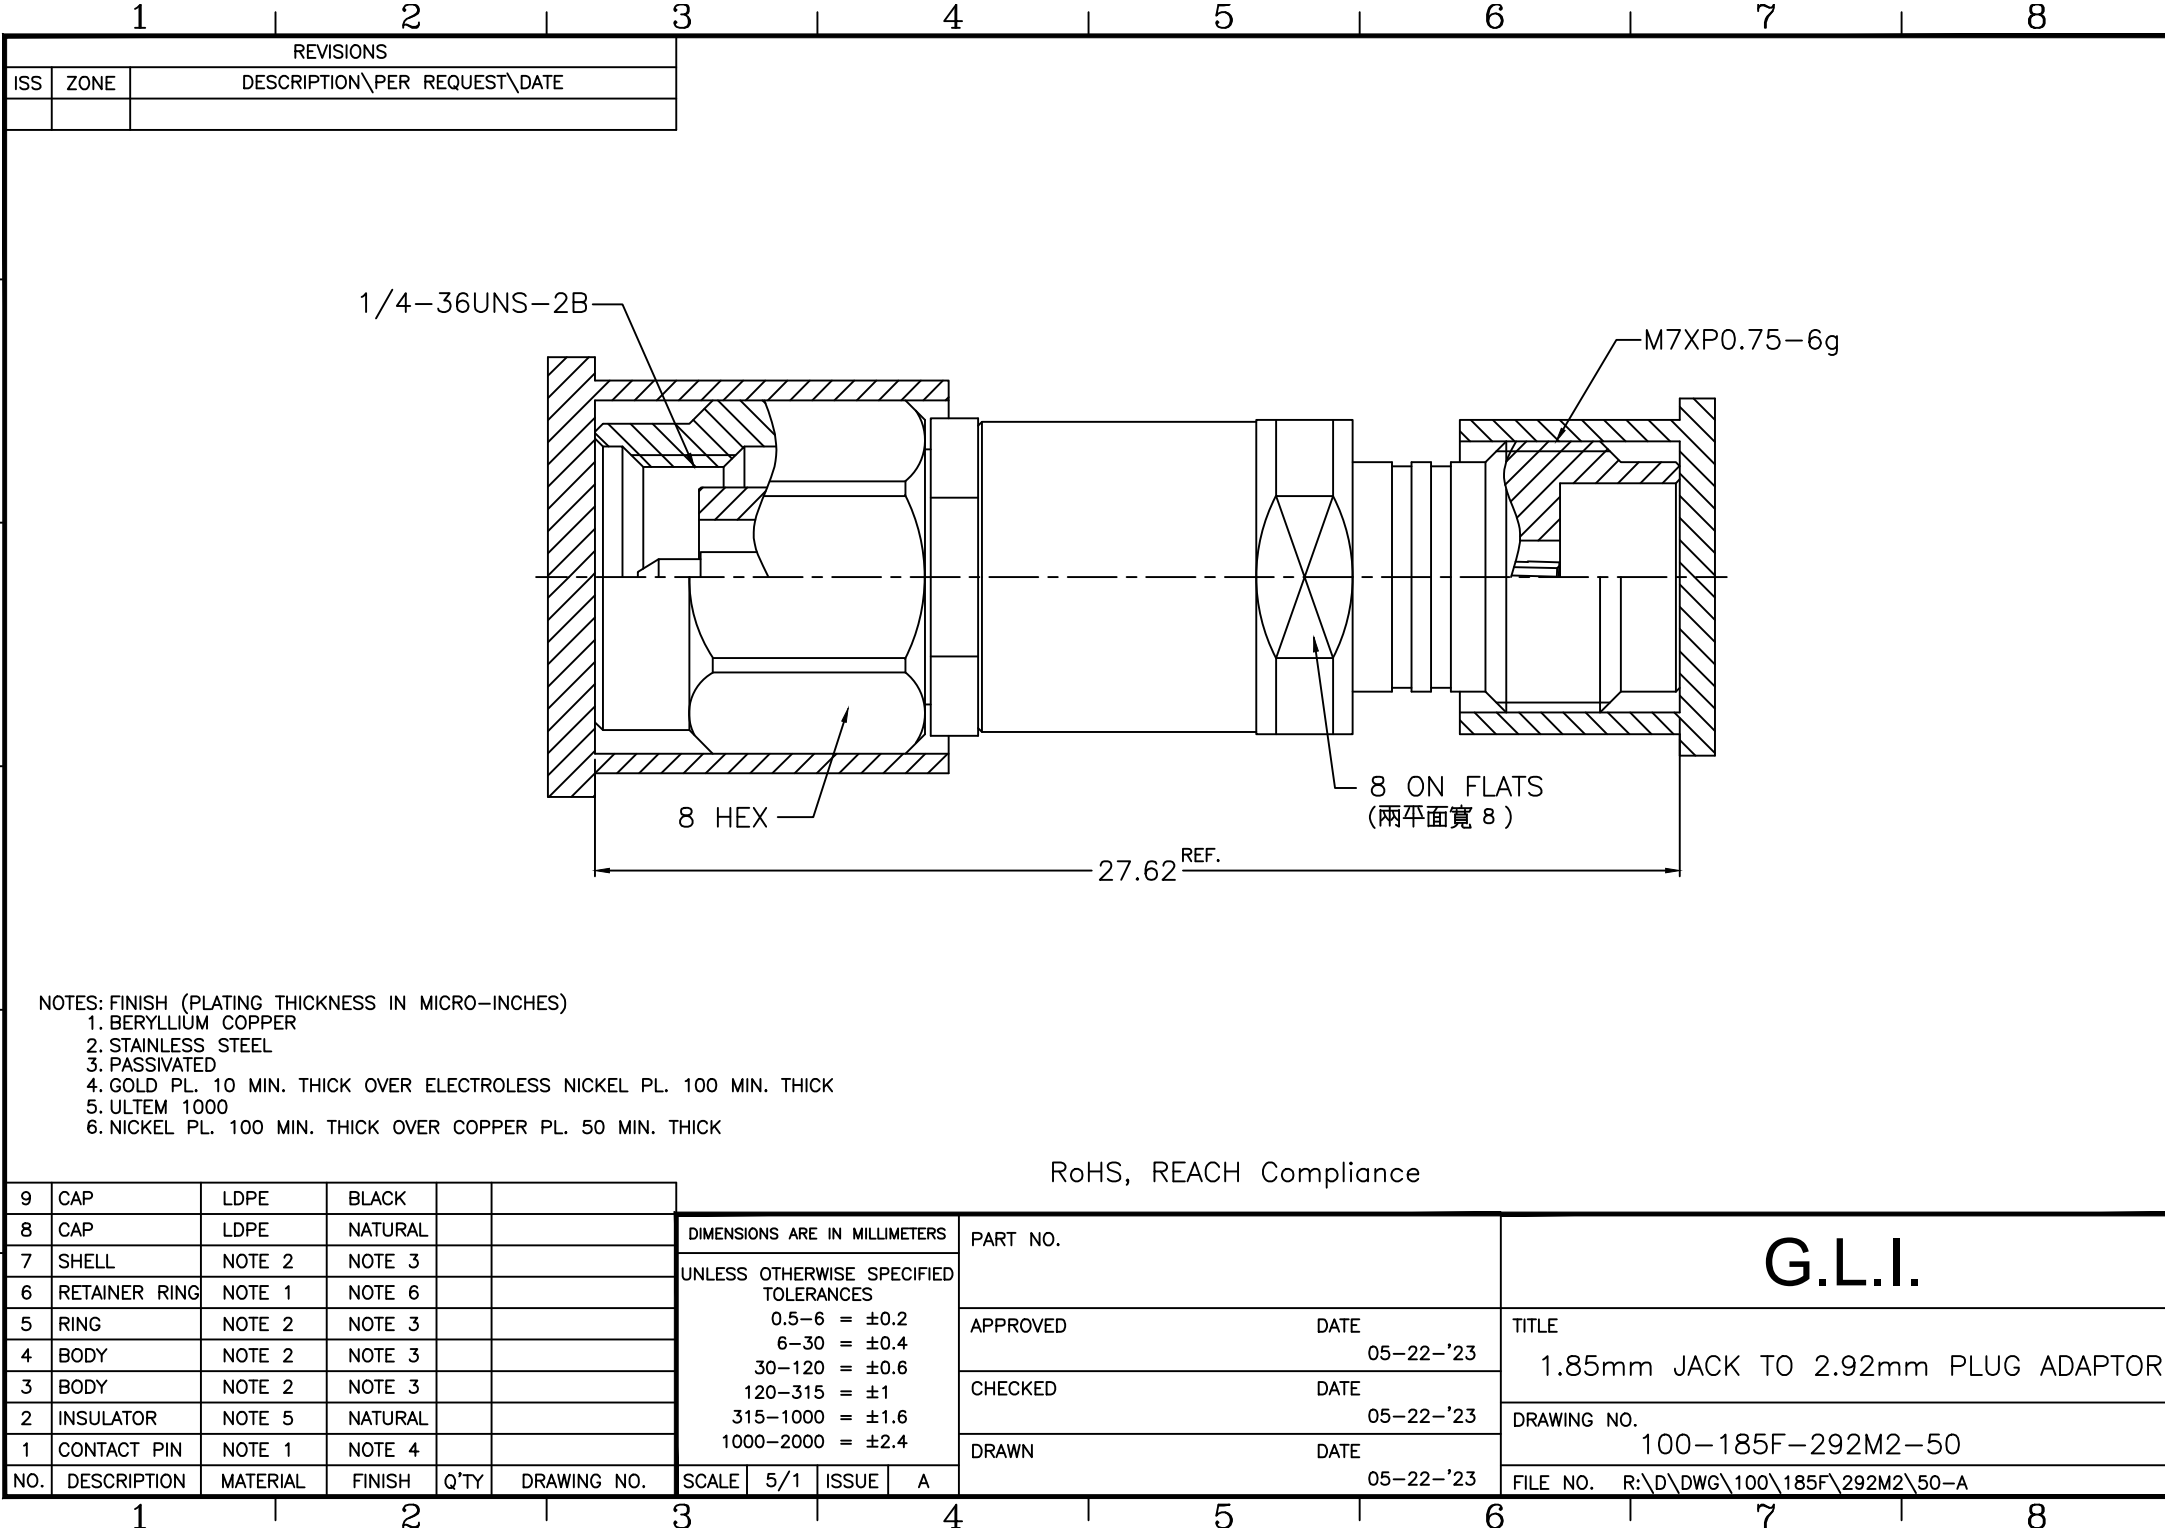

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BERYLLIUM COPPER
- 2. STAINLESS STEEL
- 3. PASSIVATED
- 4. GOLD PL. 10 MIN. THICK OVER ELECTROLESS NICKEL PL. 100 MIN. THICK
- 5. ULTEM 1000
- 6. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK

RoHS, REACH Compliance

9	CAP	LDPE	BLACK			DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.			
8	CAP	LDPE	NATURAL												
7	SHELL	NOTE 2	NOTE 3			UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED		DATE 05-22-'23		TITLE 1.85mm JACK TO 2.92mm PLUG ADAPTOR	
6	RETAINER RING	NOTE 1	NOTE 6												
5	RING	NOTE 2	NOTE 3							CHECKED		DATE 05-22-'23		DRAWING NO. 100-185F-292M2-50	
4	BODY	NOTE 2	NOTE 3												
3	BODY	NOTE 2	NOTE 3							DRAWN		DATE 05-22-'23		FILE NO. R:\D\DWG\100\185F\292M2\50-A	
2	INSULATOR	NOTE 5	NATURAL												
1	CONTACT PIN	NOTE 1	NOTE 4												
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A						