


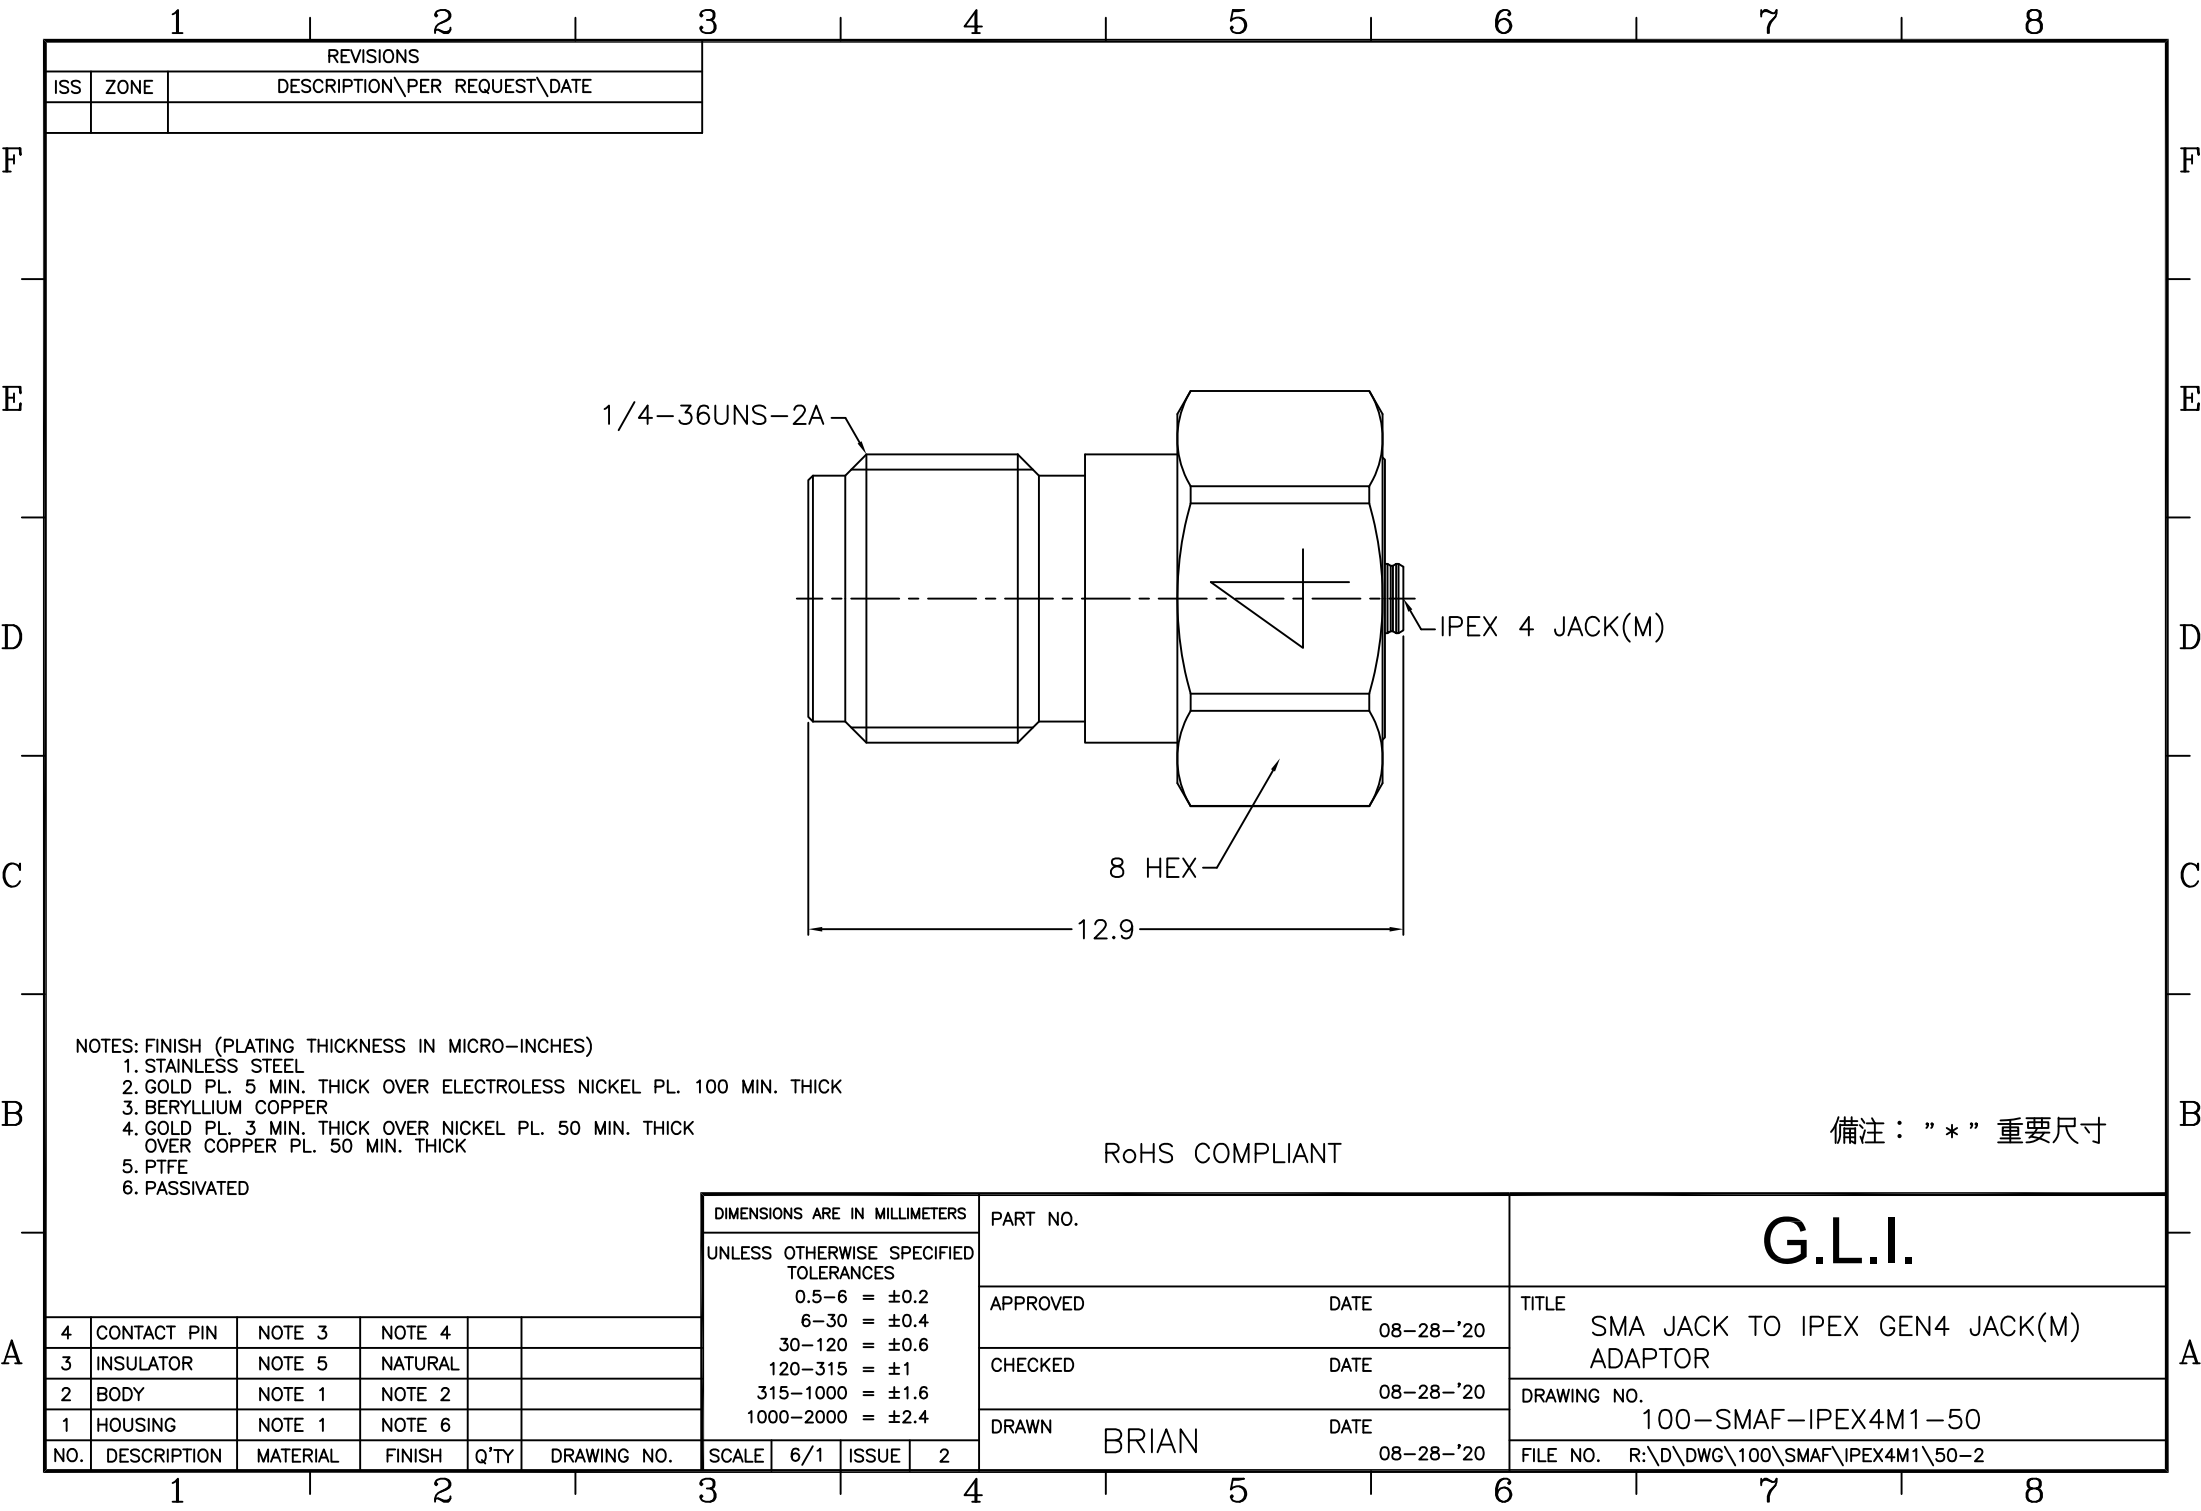

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. STAINLESS STEEL
2. GOLD PL. 5 MIN. THICK OVER ELECTROLESS NICKEL PL. 100 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
5. PTFE
6. PASSIVATED

RoHS COMPLIANT

備注： ” * ” 重要尺寸

						DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.			
						UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4									
										APPROVED		DATE		TITLE SMA JACK TO IPEX GEN4 JACK(M) ADAPTOR	
										CHECKED		DATE			
										DRAWN		DATE			
4	CONTACT PIN	NOTE 3	NOTE 4			SCALE	6/1	ISSUE	2	BRIAN	08-28-'20	DRAWING NO. 100-SMAF-IPEX4M1-50			
3	INSULATOR	NOTE 5	NATURAL			FILE NO. R:\D\DWG\100\SMAF\IPEX4M1\50-2									
2	BODY	NOTE 1	NOTE 2												
1	HOUSING	NOTE 1	NOTE 6												
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.										

4	CONTACT PIN	NOTE 3	NOTE 4		
3	INSULATOR	NOTE 5	NATURAL		
2	BODY	NOTE 1	NOTE 2		
1	HOUSING	NOTE 1	NOTE 6		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.