REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

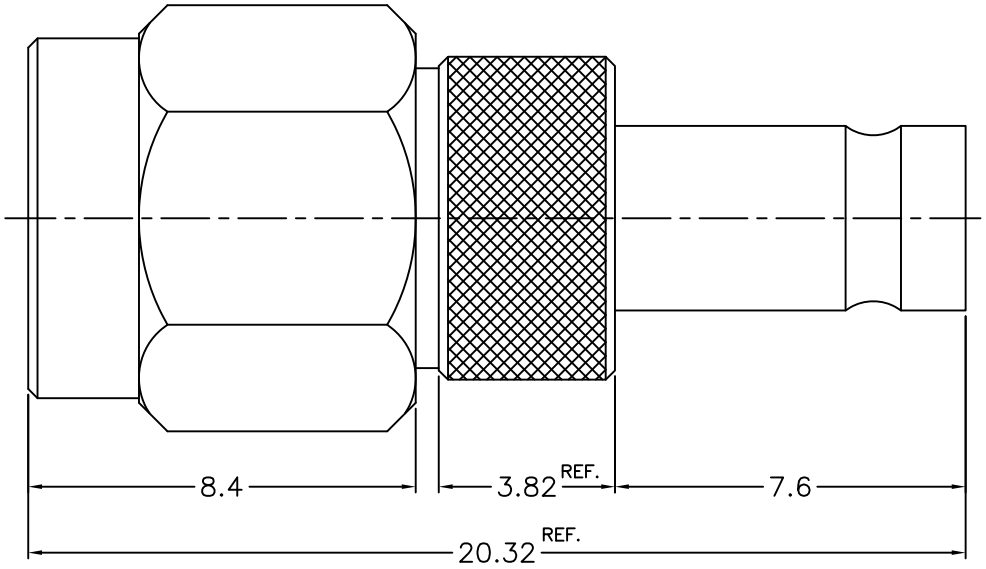

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. BERYLLIUM COPPER
3. ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
4. SILVER PL. 200 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON
6. PASSIVATED

RoHS COMPLIANT

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	CONTACT PIN	NOTE 2	NOTE 4	1	100-SMAM1-123F-6
5	INSULATOR	NOTE 5	NATURAL	1	100-SMAM-5-50T
4	GASKET	SILICONE	RED	1	GS-43-60-06
3	RETAINER RING	SUS 304	NOTE 6	1	1436-1000-4
2	BODY	NOTE 1	NOTE 3	1	100-SMAM1-123F-2
1	SHELL	NOTE 1	NOTE 3	1	1436-1000-1

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE	6/1	ISSUE	A

PART NO. RF123F-SM

APPROVED	DATE	05-18-'17
CHECKED	DATE	05-18-'17
DRAWN	DATE	05-18-'17

G.L.I.

TITLE
SMA PLUG TO 1.0/2.3 JACK ADAPTOR

DRAWING NO. 100-SMAM1-123F-50

FILE NO. R:\D\G\DWG\100\SMAM1-123F\50