


F
E
D
C
B
A

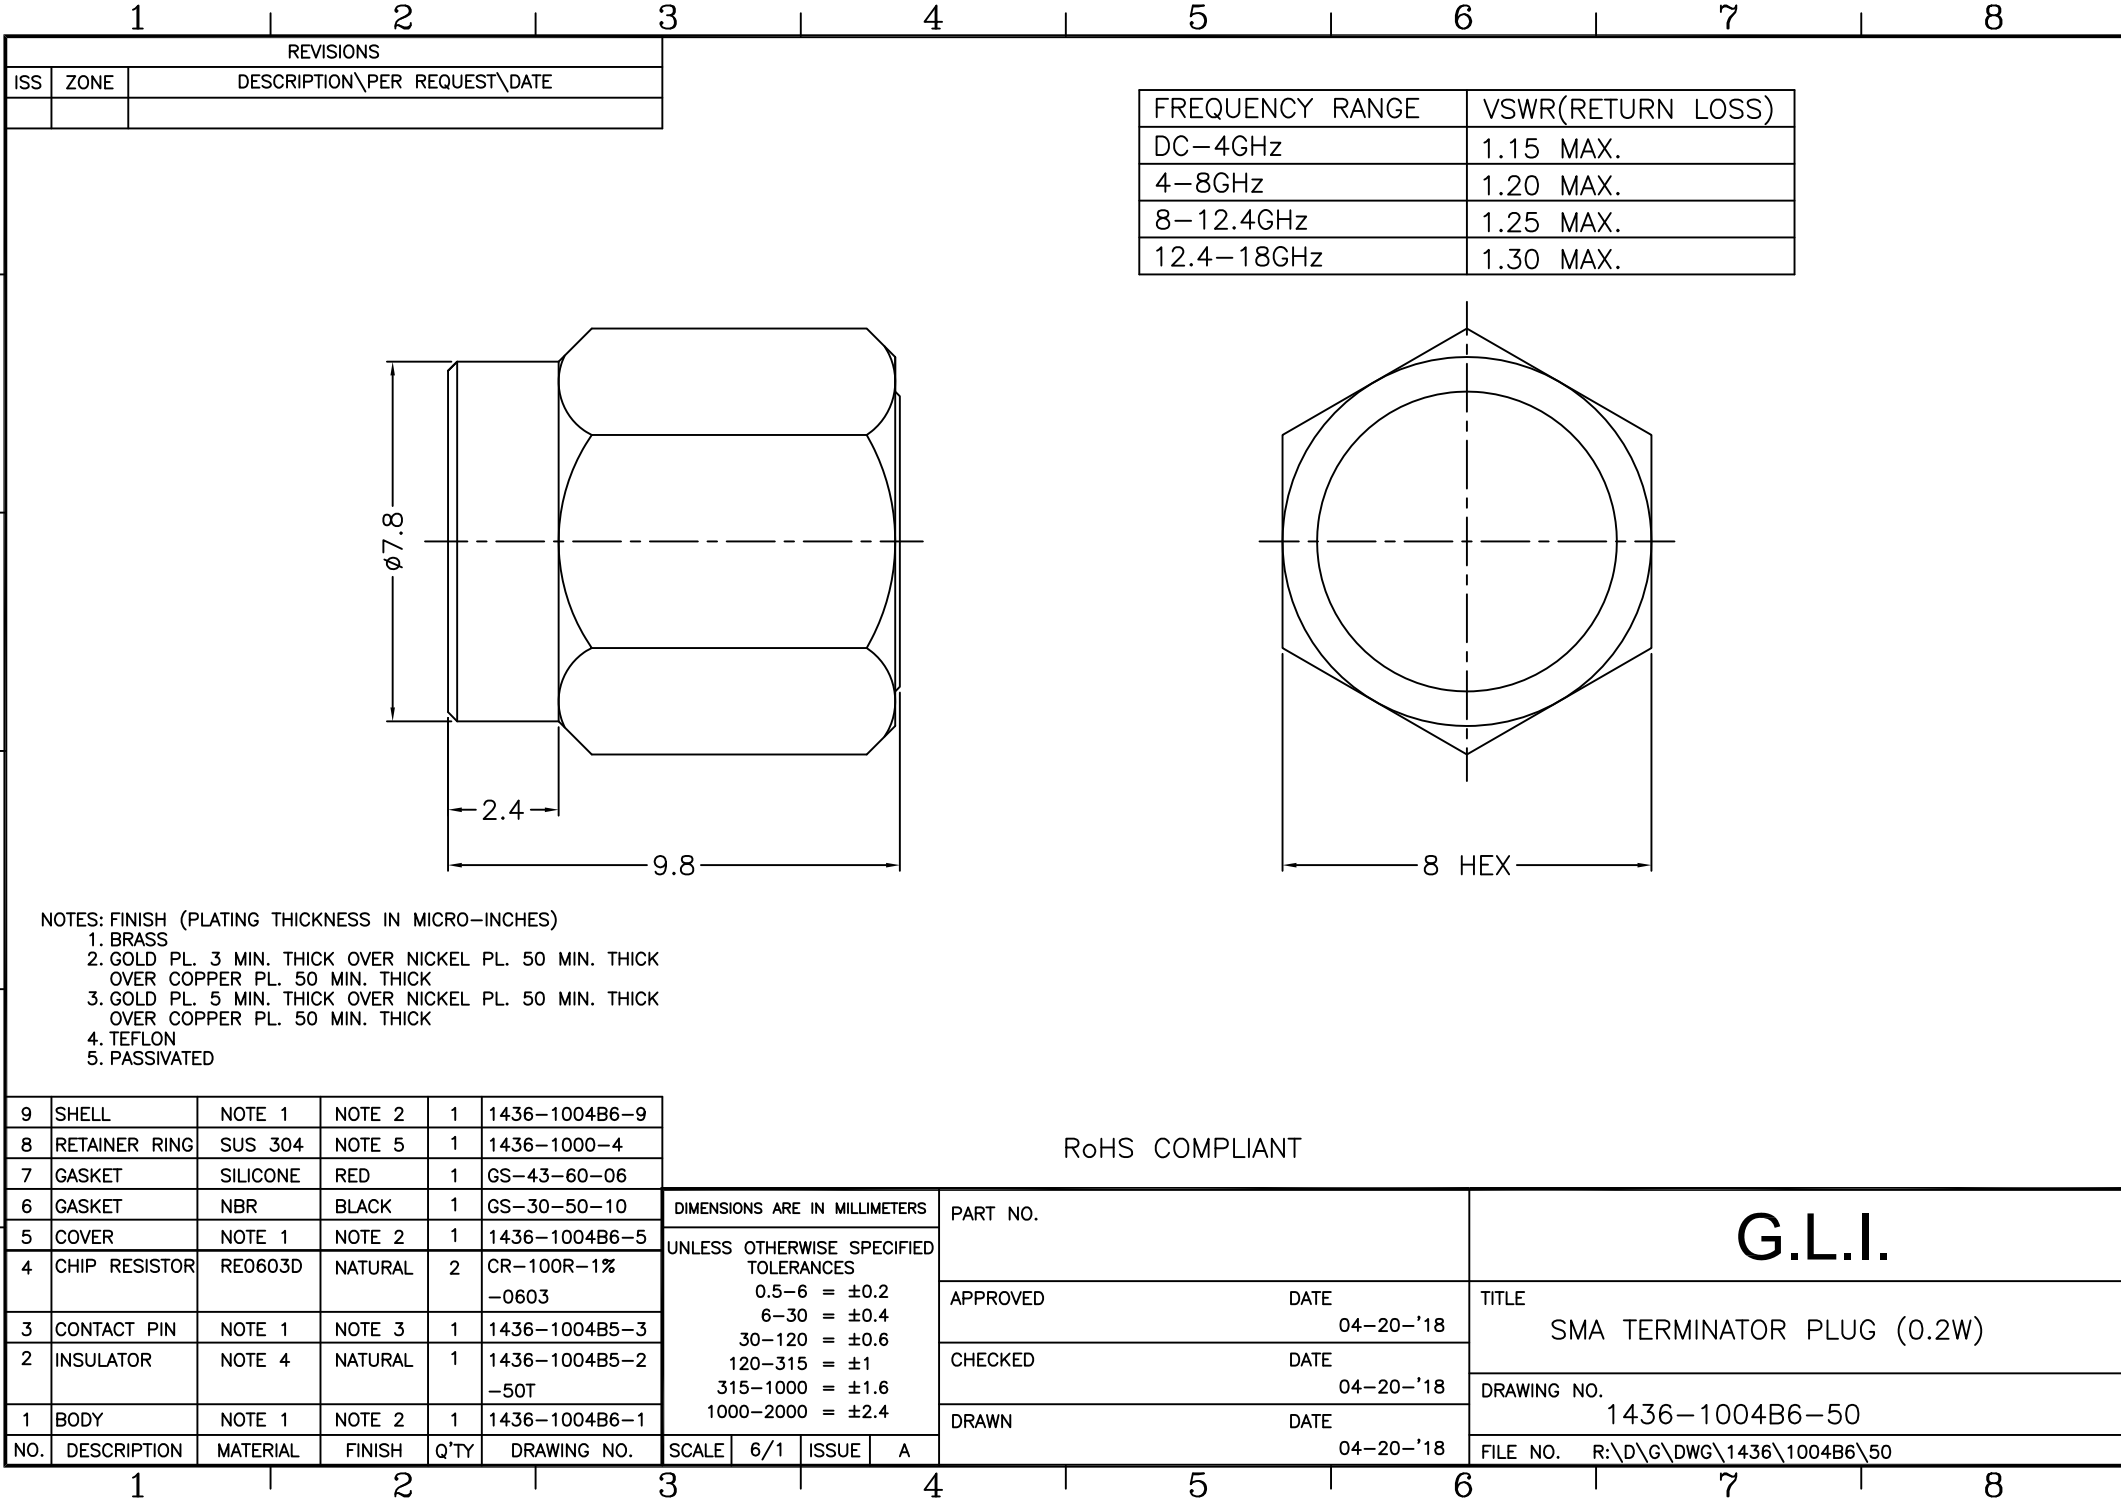

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

FREQUENCY RANGE	VSWR(RETURN LOSS)
DC-4GHz	1.15 MAX.
4-8GHz	1.20 MAX.
8-12.4GHz	1.25 MAX.
12.4-18GHz	1.30 MAX.

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
3. GOLD PL. 5 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
4. TEFLON
5. PASSIVATED

9	SHELL	NOTE 1	NOTE 2	1	1436-1004B6-9
8	RETAINER RING	SUS 304	NOTE 5	1	1436-1000-4
7	GASKET	SILICONE	RED	1	GS-43-60-06
6	GASKET	NBR	BLACK	1	GS-30-50-10
5	COVER	NOTE 1	NOTE 2	1	1436-1004B6-5
4	CHIP RESISTOR	RE0603D	NATURAL	2	CR-100R-1% -0603
3	CONTACT PIN	NOTE 1	NOTE 3	1	1436-1004B5-3
2	INSULATOR	NOTE 4	NATURAL	1	1436-1004B5-2 -50T
1	BODY	NOTE 1	NOTE 2	1	1436-1004B6-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6 = ±0.2			
6-30 = ±0.4			
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			
SCALE	6/1	ISSUE	A

PART NO.	
APPROVED	DATE 04-20-'18
CHECKED	DATE 04-20-'18
DRAWN	DATE 04-20-'18

G.L.I.	
TITLE SMA TERMINATOR PLUG (0.2W)	
DRAWING NO. 1436-1004B6-50	
FILE NO. R:\D\G\DWG\1436\1004B6\50	

F
E
D
C
B
A