REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

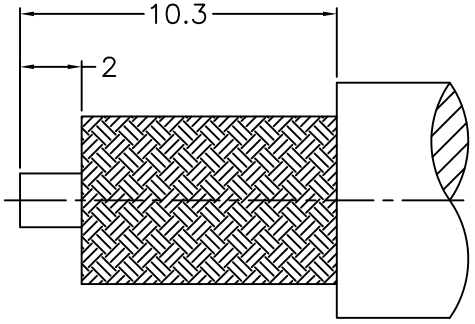

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

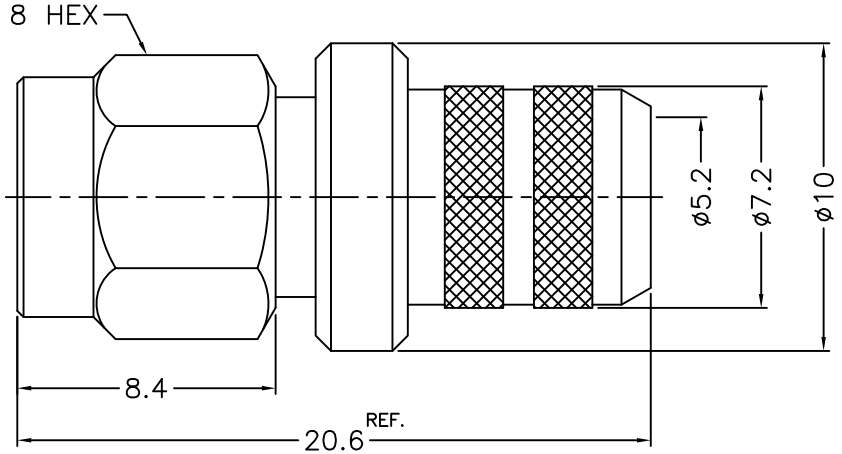

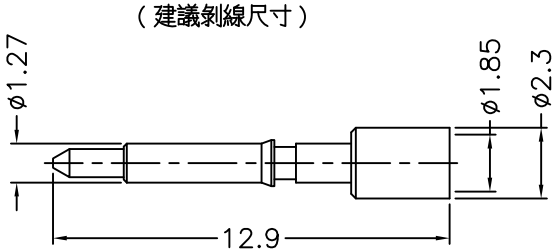

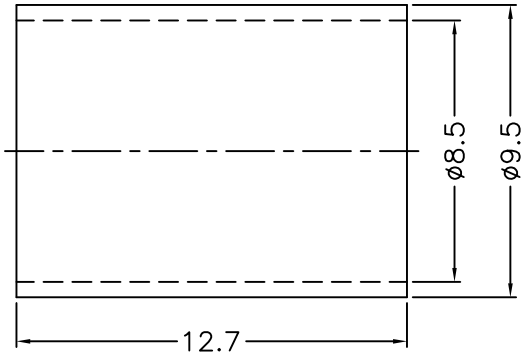

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
4. TEFLON
5. PASSIVATED
6. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK

1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	FERRULE	NOTE 1	NOTE 6	1	FR-85-95-127
6	CONTACT PIN	NOTE 1	NOTE 3	1	1436-1111A42-6 -1.85
5	GASKET	SILICONE	RED	1	GS-43-60-06
4	RETAINER RING	SUS 304	NOTE 5	1	1436-1000-4
3	INSULATOR	NOTE 4	NATURAL	1	1436-1111A3-3 -50T
2	BODY	NOTE 1	NOTE 2	1	1436-1111A42-2 -41
1	SHELL	NOTE 1	NOTE 2	1	1436-1000-1

RoHS COMPLIANT

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 4/1 ISSUE A

PART NO.

APPROVED DATE 02-25-'19

CHECKED DATE 02-25-'19

DRAWN DATE 02-25-'19

G.L.I.

TITLE
SMA CRIMP PLUG
(FOR 5D-FB, LMR300 CABLE)

DRAWING NO. 1436-1111A42-41-50

FILE NO. R:\D\G\DWG\1436\1111A42\41\50