


F
E
D
C
B
A

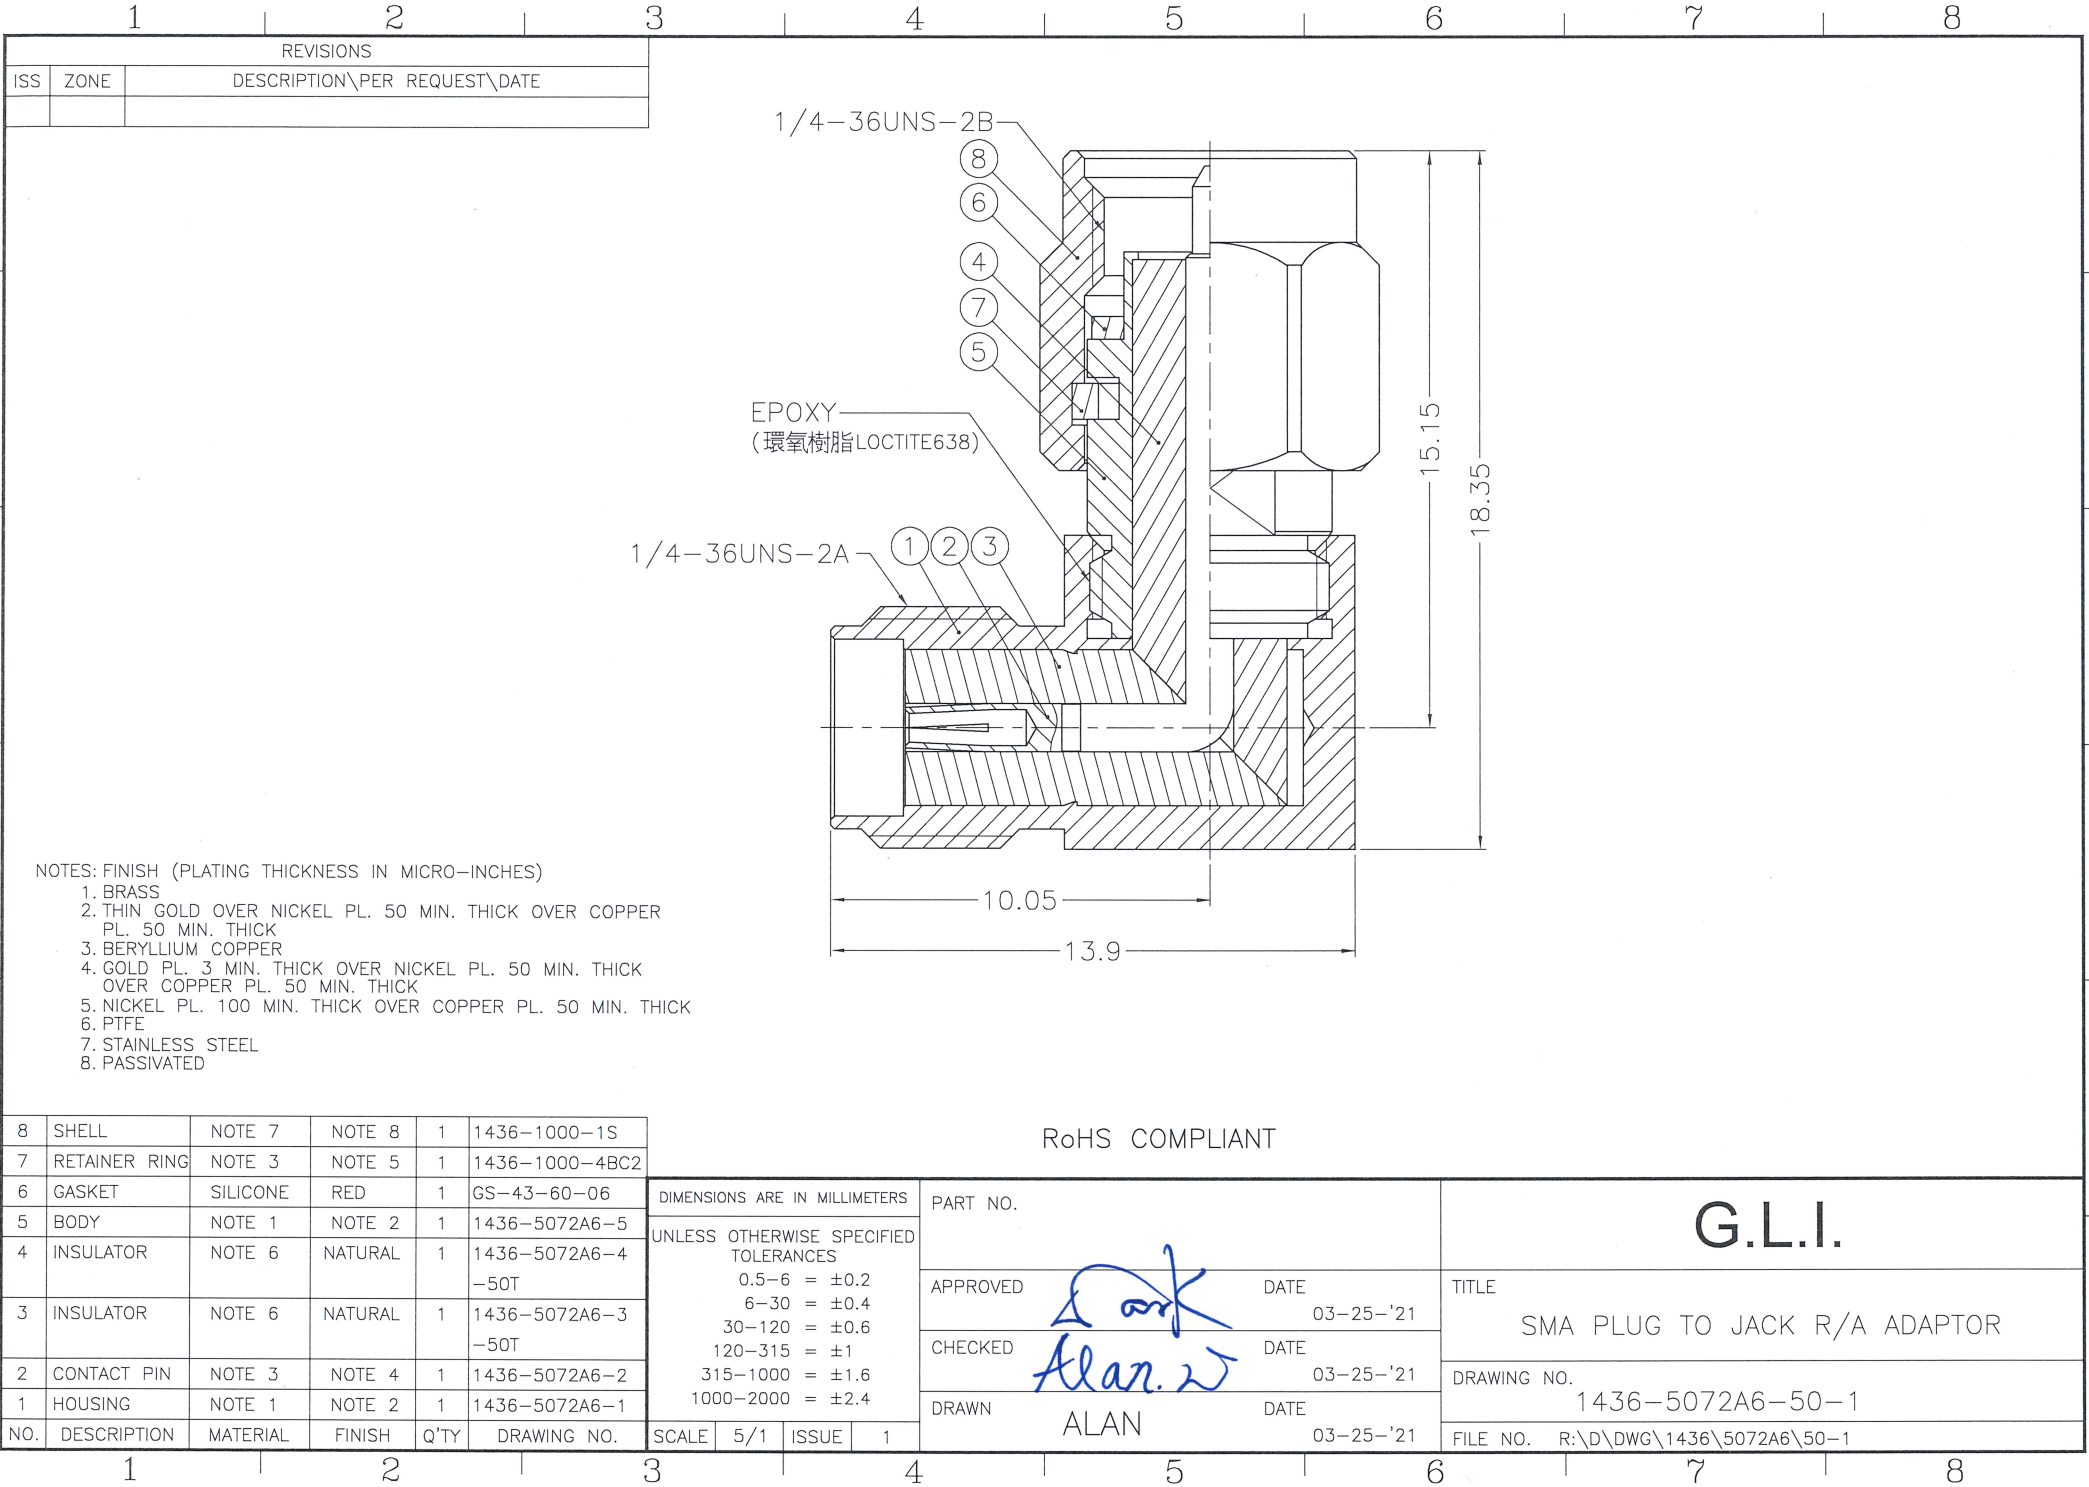

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3. BERYLLIUM COPPER
- 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 5. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 6. PTFE
- 7. STAINLESS STEEL
- 8. PASSIVATED

8	SHELL	NOTE 7	NOTE 8	1	1436-1000-1S
7	RETAINER RING	NOTE 3	NOTE 5	1	1436-1000-4BC2
6	GASKET	SILICONE	RED	1	GS-43-60-06
5	BODY	NOTE 1	NOTE 2	1	1436-5072A6-5
4	INSULATOR	NOTE 6	NATURAL	1	1436-5072A6-4-50T
3	INSULATOR	NOTE 6	NATURAL	1	1436-5072A6-3-50T
2	CONTACT PIN	NOTE 3	NOTE 4	1	1436-5072A6-2
1	HOUSING	NOTE 1	NOTE 2	1	1436-5072A6-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6 = ±0.2			
6-30 = ±0.4			
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			
SCALE	5/1	ISSUE	1

PART NO.	
APPROVED	DATE 03-25-'21
CHECKED	DATE 03-25-'21
DRAWN	DATE 03-25-'21

G.L.I.	
TITLE	
SMA PLUG TO JACK R/A ADAPTOR	
DRAWING NO.	
1436-5072A6-50-1	
FILE NO.	
R:\D\DWG\1436\5072A6\50-1	

RoHS COMPLIANT

F
E
D
C
B
A