


F
E
D
C
B
A

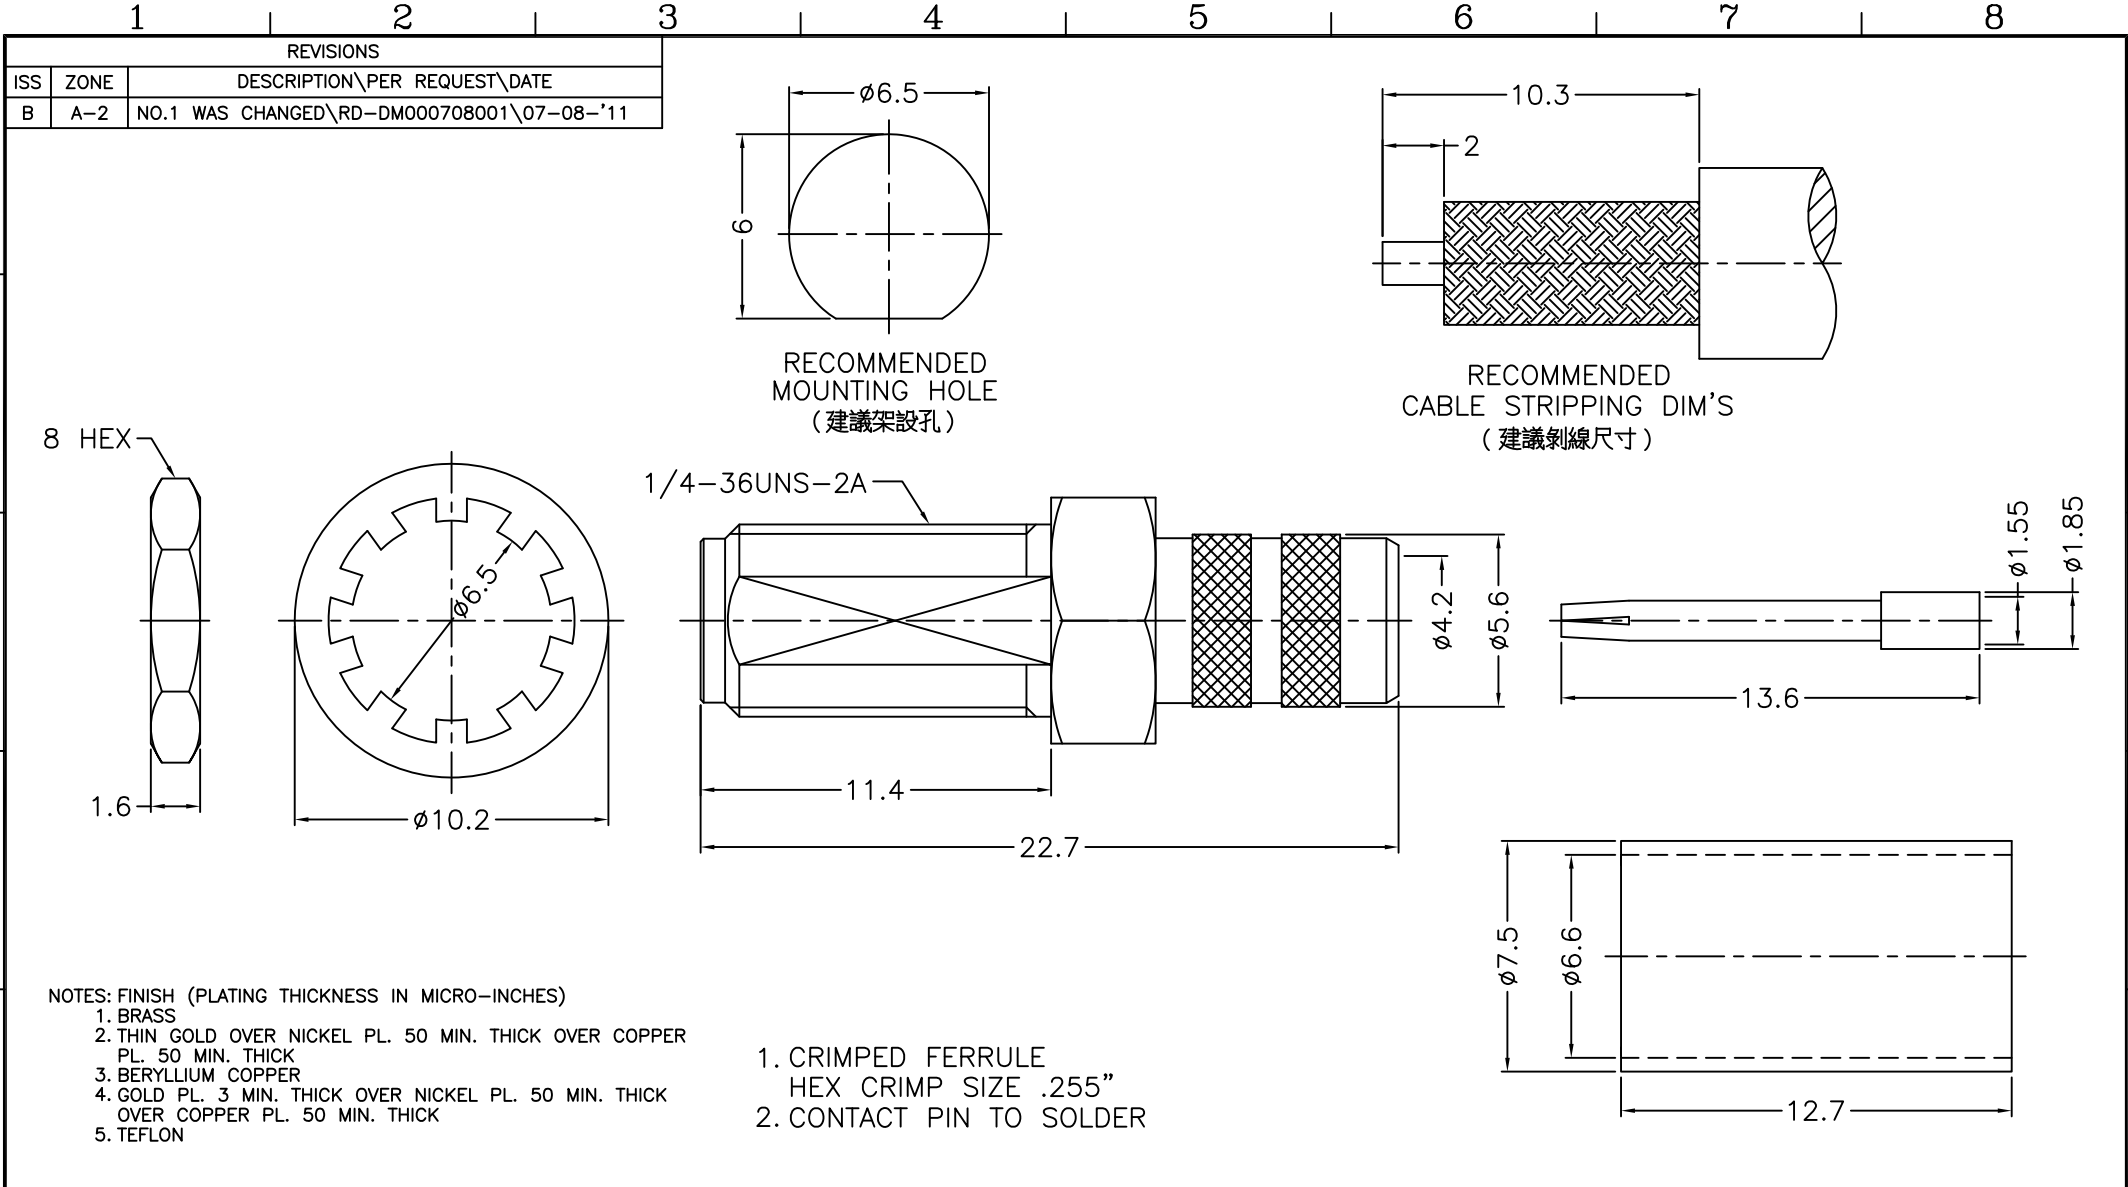

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3. BERYLLIUM COPPER
- 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 5. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

6	HEX NUT	NOTE 1	NOTE 2	1	HN-8-1436-16	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.		G.L.I.			
5	LOCK WASHER	NOTE 1	NOTE 2	1	LW-65-102-05										
4	FERRULE	NOTE 1	NOTE 2	1	FR-66-75-127					APPROVED		DATE 07-08-'11		TITLE SMA BULKHEAD CRIMP JACK (FOR RG-8/X, LMR-240)	
3	CONTACT PIN	NOTE 3	NOTE 4	1	1436-6411A1-3 1.55					CHECKED		DATE 07-08-'11			
2	INSULATOR	NOTE 5	NATURAL	1	1436-6411A1-2T					DRAWN		DATE 07-08-'11		DRAWING NO. 1436-6411A1-16-50	
1	BODY	NOTE 1	NOTE 2	1	1436-6411A1-1-16					FILE NO. R:\D\G\DWG\1436\6411A1\16\50					
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	B						

1 2 3 4 5 6 7 8