
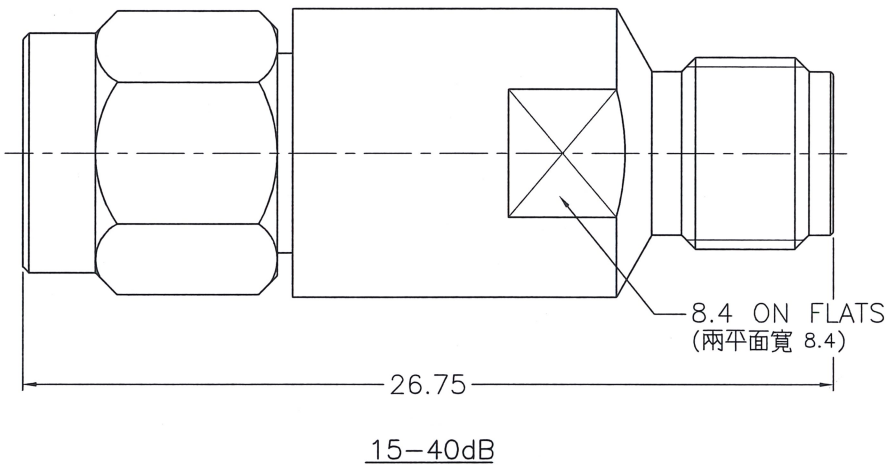


F
E
D
C
B
A

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	D-6	ADDED VIEW FOR 15-40dB\N/A\03-28-'17
A2	D-3	ADDED FLATS\N/A\08-05-'20


1436AT-5071S1-06 XX 2
| | |
GHz dB Watt

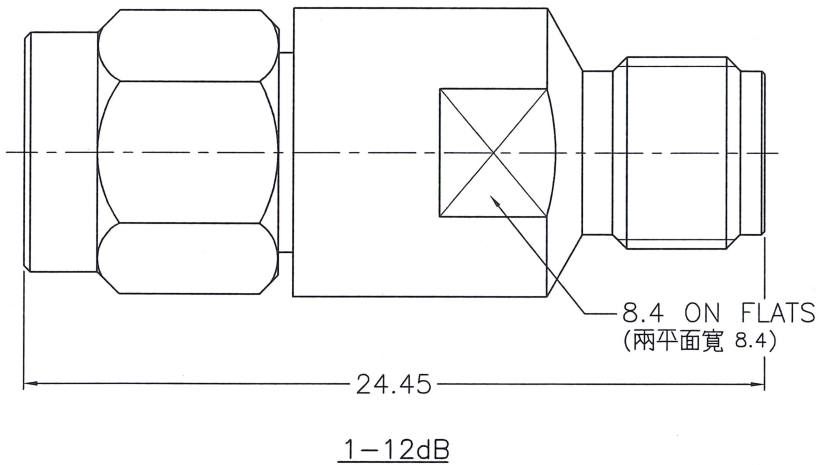

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. STAINLESS STEEL
2. GOLD
3. TEFLON
4. BERYLLIUM COPPER

RoHS COMPLIANT



4. BERYLLIUM COPPER						DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.	
						UNLESS OTHERWISE SPECIFIED TOLERANCES							
6	CONTACT PIN	NOTE 4	NOTE 2	1		0.5-6 = ±0.2				APPROVED  DATE 08-05-'20		TITLE SMA PLUG TO JACK FIXED ATTENUATOR	
5	GASKET	SILICONE	RED	1		6-30 = ±0.4							
4	RETAINER RING	SUS303	NATURAL	1		30-120 = ±0.6				CHECKED  DATE 08-05-'20		DRAWING NO. 1436AT-5071S1	
3	INSULATOR	NOTE 3	NATURAL	1		120-315 = ±1							
2	BODY	NOTE 1		1		315-1000 = ±1.6				DRAWN  DATE 08-05-'20		FILE NO. R:\D\DWG\1436\AT\5071S1-A2	
1	SHELL	NOTE 1		1		1000-2000 = ±2.4							
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	A2				