REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

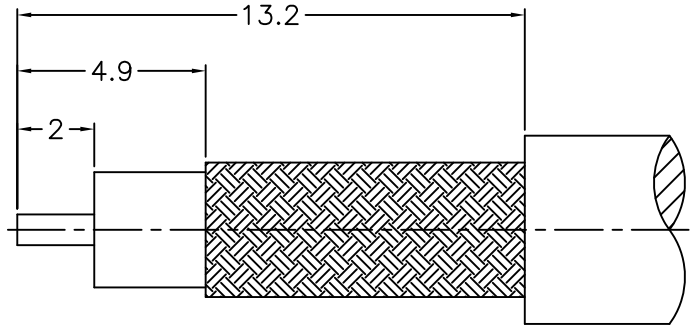

RECOMMENDED
CABLE STRIPPING DIM'S
（建議剝線尺寸）

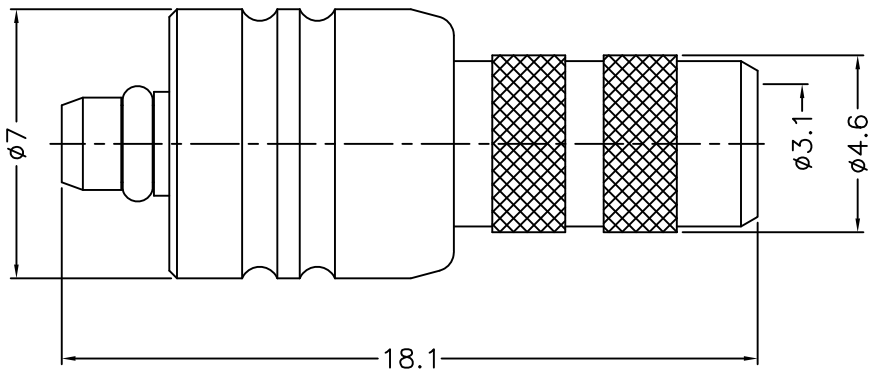

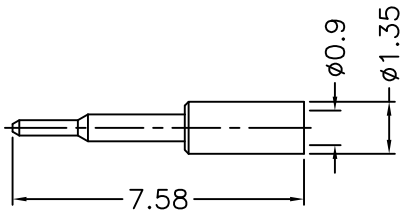

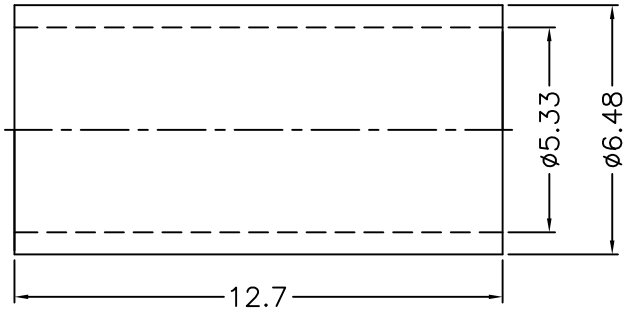

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

1. CRIMPED FERRULE HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE .043"

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	FERRULE	COPPER	NOTE 2	1	FR-533-648-127C
5	CONTACT PIN	NOTE 1	NOTE 4	1	200-1121A4-5-0.9
4	RETAINER RING	NOTE 3	NOTE 2	1	200-1000-5
3	BARREL	NOTE 1	NOTE 2	1	500-6121A2-3-06
2	INSULATOR	NOTE 5	NATURAL	1	200-1121A4-2-50T
1	BODY	NOTE 1	NOTE 2	1	200-1121A4-1

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE	5/1	ISSUE	A

PART NO.

APPROVED — DATE 12-19-'11

CHECKED — DATE 12-19-'11

DRAWN — DATE 12-19-'11

G.L.I.

TITLE
MMCX CRIMP PLUG
(FOR RG-58, 58A, 58C, 141)

DRAWING NO.
200-1121A4-06-50

FILE NO. R:\D\G\DWG\200\1121A4\06\50