


F
E
D
C
B
A

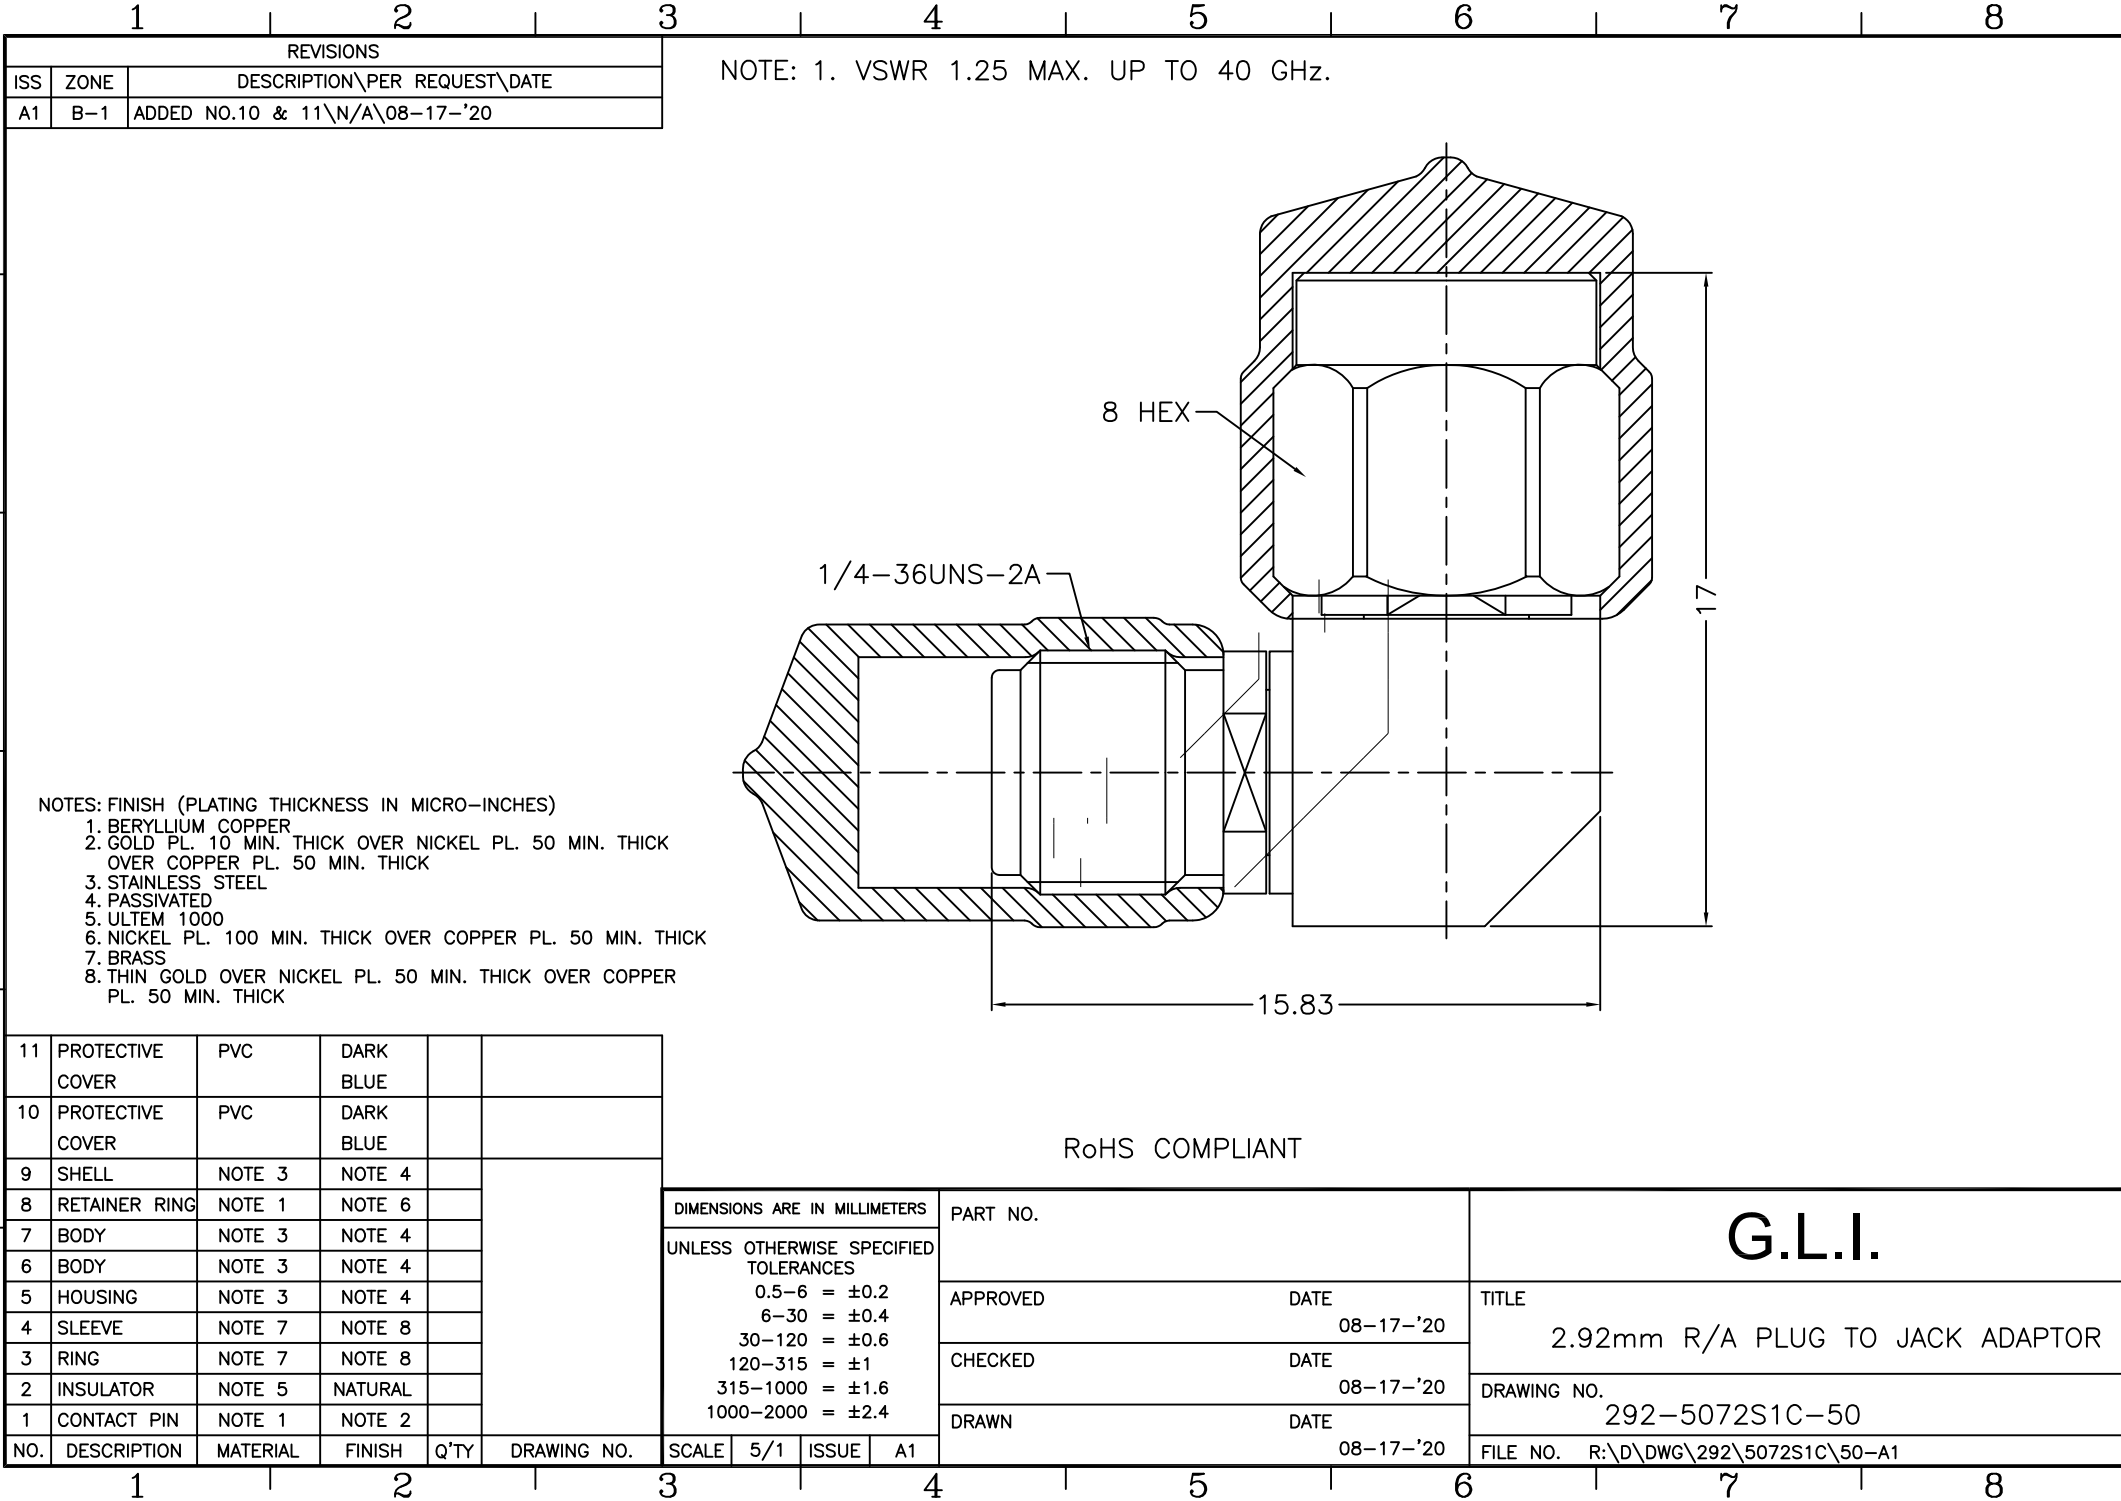

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BERYLLIUM COPPER
2. GOLD PL. 10 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
3. STAINLESS STEEL
4. PASSIVATED
5. ULTEM 1000
6. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
7. BRASS
8. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER
PL. 50 MIN. THICK

11	PROTECTIVE COVER	PVC	DARK BLUE		
10	PROTECTIVE COVER	PVC	DARK BLUE		
9	SHELL	NOTE 3	NOTE 4		
8	RETAINER RING	NOTE 1	NOTE 6		
7	BODY	NOTE 3	NOTE 4		
6	BODY	NOTE 3	NOTE 4		
5	HOUSING	NOTE 3	NOTE 4		
4	SLEEVE	NOTE 7	NOTE 8		
3	RING	NOTE 7	NOTE 8		
2	INSULATOR	NOTE 5	NATURAL		
1	CONTACT PIN	NOTE 1	NOTE 2		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.			
UNLESS OTHERWISE SPECIFIED TOLERANCES									
0.5-6 = ±0.2				APPROVED				DATE	
6-30 = ±0.4									
30-120 = ±0.6				CHECKED		DATE			
120-315 = ±1									
315-1000 = ±1.6				DRAWN		DATE			
1000-2000 = ±2.4									
SCALE	5/1	ISSUE	A1			TITLE			
						2.92mm R/A PLUG TO JACK ADAPTOR			
						DRAWING NO.			
						292-5072S1C-50			
						FILE NO. R:\D\DWG\292\5072S1C\50-A1			