

F

E

D

C

B

A

F

E

D


C

B



A

1 2 3 4 5 6 7 8


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
B	B-2	NO.6 WAS CHANGED\RD-DM050125001\01-25-'16	
C	B-2	NO.5 WAS CHANGED\RD-DM090813001\08-13-'20	

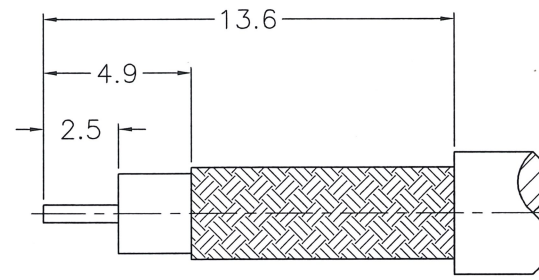

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

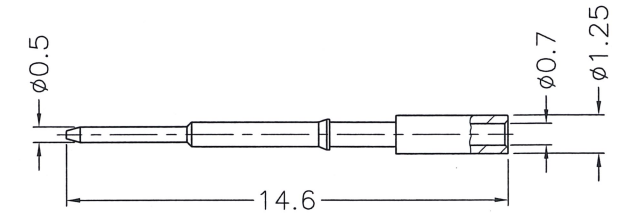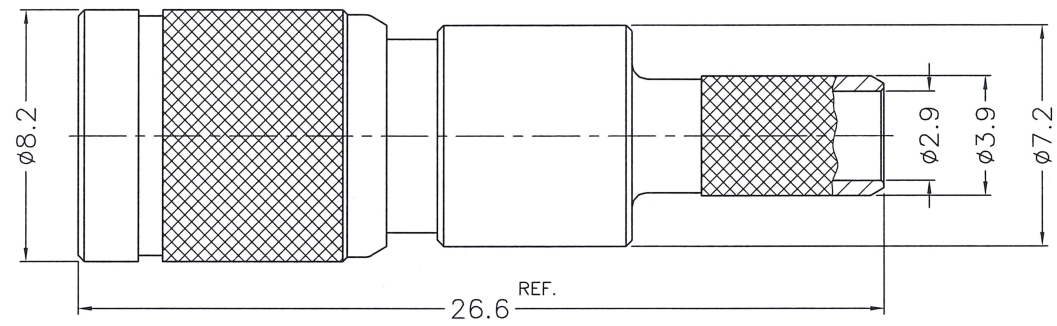

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. PTFE
6. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK

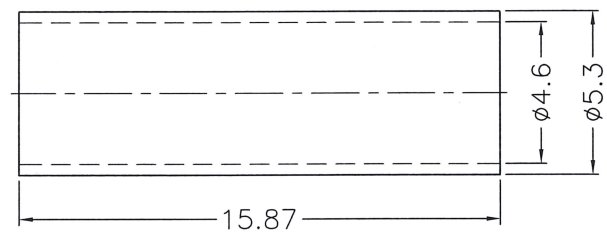

RoHS COMPLIANT



- 1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .042"

						DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.	
						UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED  DATE 08-13-'20			
7	FERRULE	NOTE 1	NOTE 2									CHECKED  DATE 08-13-'20	
6	CONTACT PIN	NOTE 1	NOTE 4			DRAWN  DATE 08-13-'20		DRAWING NO. 300-1121B14-A1-75					
5	OUT CONTACT	NOTE 3	NOTE 6							FILE NO. R:\D\DWG\300\1121B14\A1\75-C			
4	INSULATOR	NOTE 5	NATURAL										
3	SPRING	NOTE 3	NATURAL										
2	BODY	NOTE 1	NOTE 2										
1	SHELL	NOTE 1	NOTE 2										
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	C				

1 2 3 4 5 6 7 8