
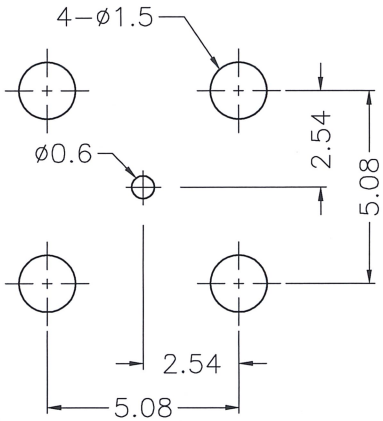
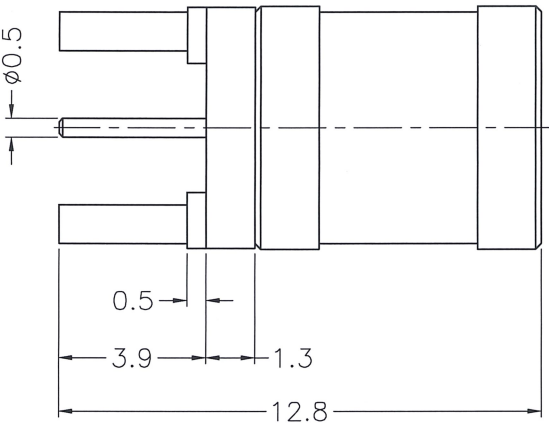


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

ELECTRICAL PERFORMANCE :
1. IMPEDANCE : 75 Ohms
2. FREQUENCY RANGE : 0~2GHz
3. WORKING VOLTAGE : 335V rms MAXIMUM
4. DIELECTRIC WITHSTANDING VOLTAGE : 1000V rms MAXIMUM
5. INSULATOR RESISTANCE : 1000 MEGOhms
6. VSWR : 1GHz 1.15 max., 2.5GHz 1.25 max., 4GHz 1.38 max.
MECHANICAL :
1. DURABILITY : 500 CYCLES MIN.
2. TEMPERATURE RANGE : -65°C TO 165°C

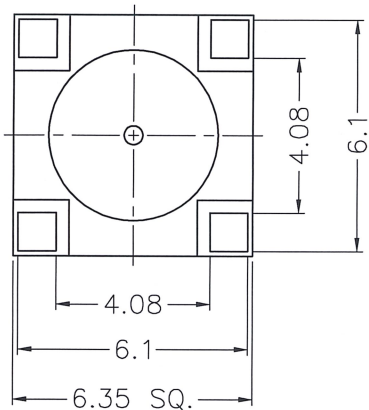

PCB MOUNTING HOLE
(印刷电路板架設孔)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 15 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

RoHS COMPLIANT



3. TELEON						DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.	
						UNLESS OTHERWISE SPECIFIED TOLERANCES				1509156			
5	RETAINER RING	NOTE 3	NATURAL	1	500-6000-6	0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE	TITLE MINI SMB P.C. MOUNT PLUG	
4	CONTACT PIN	NOTE 3	NOTE 4	1	500MN-6251A1-4						02-25-'15		
3	INSULATOR	NOTE 5	NATURAL	1	500MN-6251A1-3-75T					CHECKED	DATE		
2	BODY	NOTE 1	NOTE 2	1	500MN-6251A3-2						02-25-'15	DRAWING NO.	
1	SHELL	NOTE 1	NOTE 2	1	500MN-6251A3-1					DRAWN	DATE	500MN-6251A3-75	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A		02-25-'15	FILE NO. R:\D\C\DWG\500MN\6251A3\75	