




RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

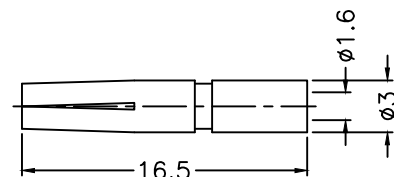

1. CRIMPED FERRULE
HEX. CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .100"

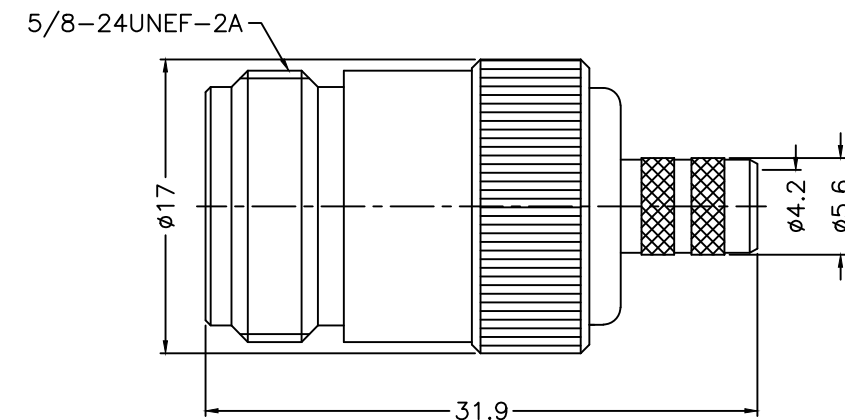

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. PHOSPHOR BRONZE
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
5. TEFLON

G.L.I.

N CRIMP JACK
(FOR 8X, LMR-240 CABLE)

DRAWING NO. 5824-6121A1-16-50

FILE NO. R:\D\G\DWG\5824\6121A1\16\50

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED
TOLERANCES

0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

PART NO.

APPROVED

DATE

03-21-'12

CHECKED

DATE

03-21-'12

DRAWN

DATE

03-21-'12

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	FERRULE	NOTE 1	NOTE 2	1	FR-66-75-127
4	CONTACT PIN	NOTE 3	NOTE 4	1	5824-6121A1-4-1.6
3	BARREL	NOTE 1	NOTE 2	1	5824-1000-3-16
2	INSULATOR	NOTE 5	NATURAL	1	5824-1000-4-B
1	BODY	NOTE 1	NOTE 2	1	5824-6121A1-1

SCALE 2.5/1 ISSUE A