




RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
4. DELRIN

- 1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
- 2. CONTACT PIN TO SOLDER

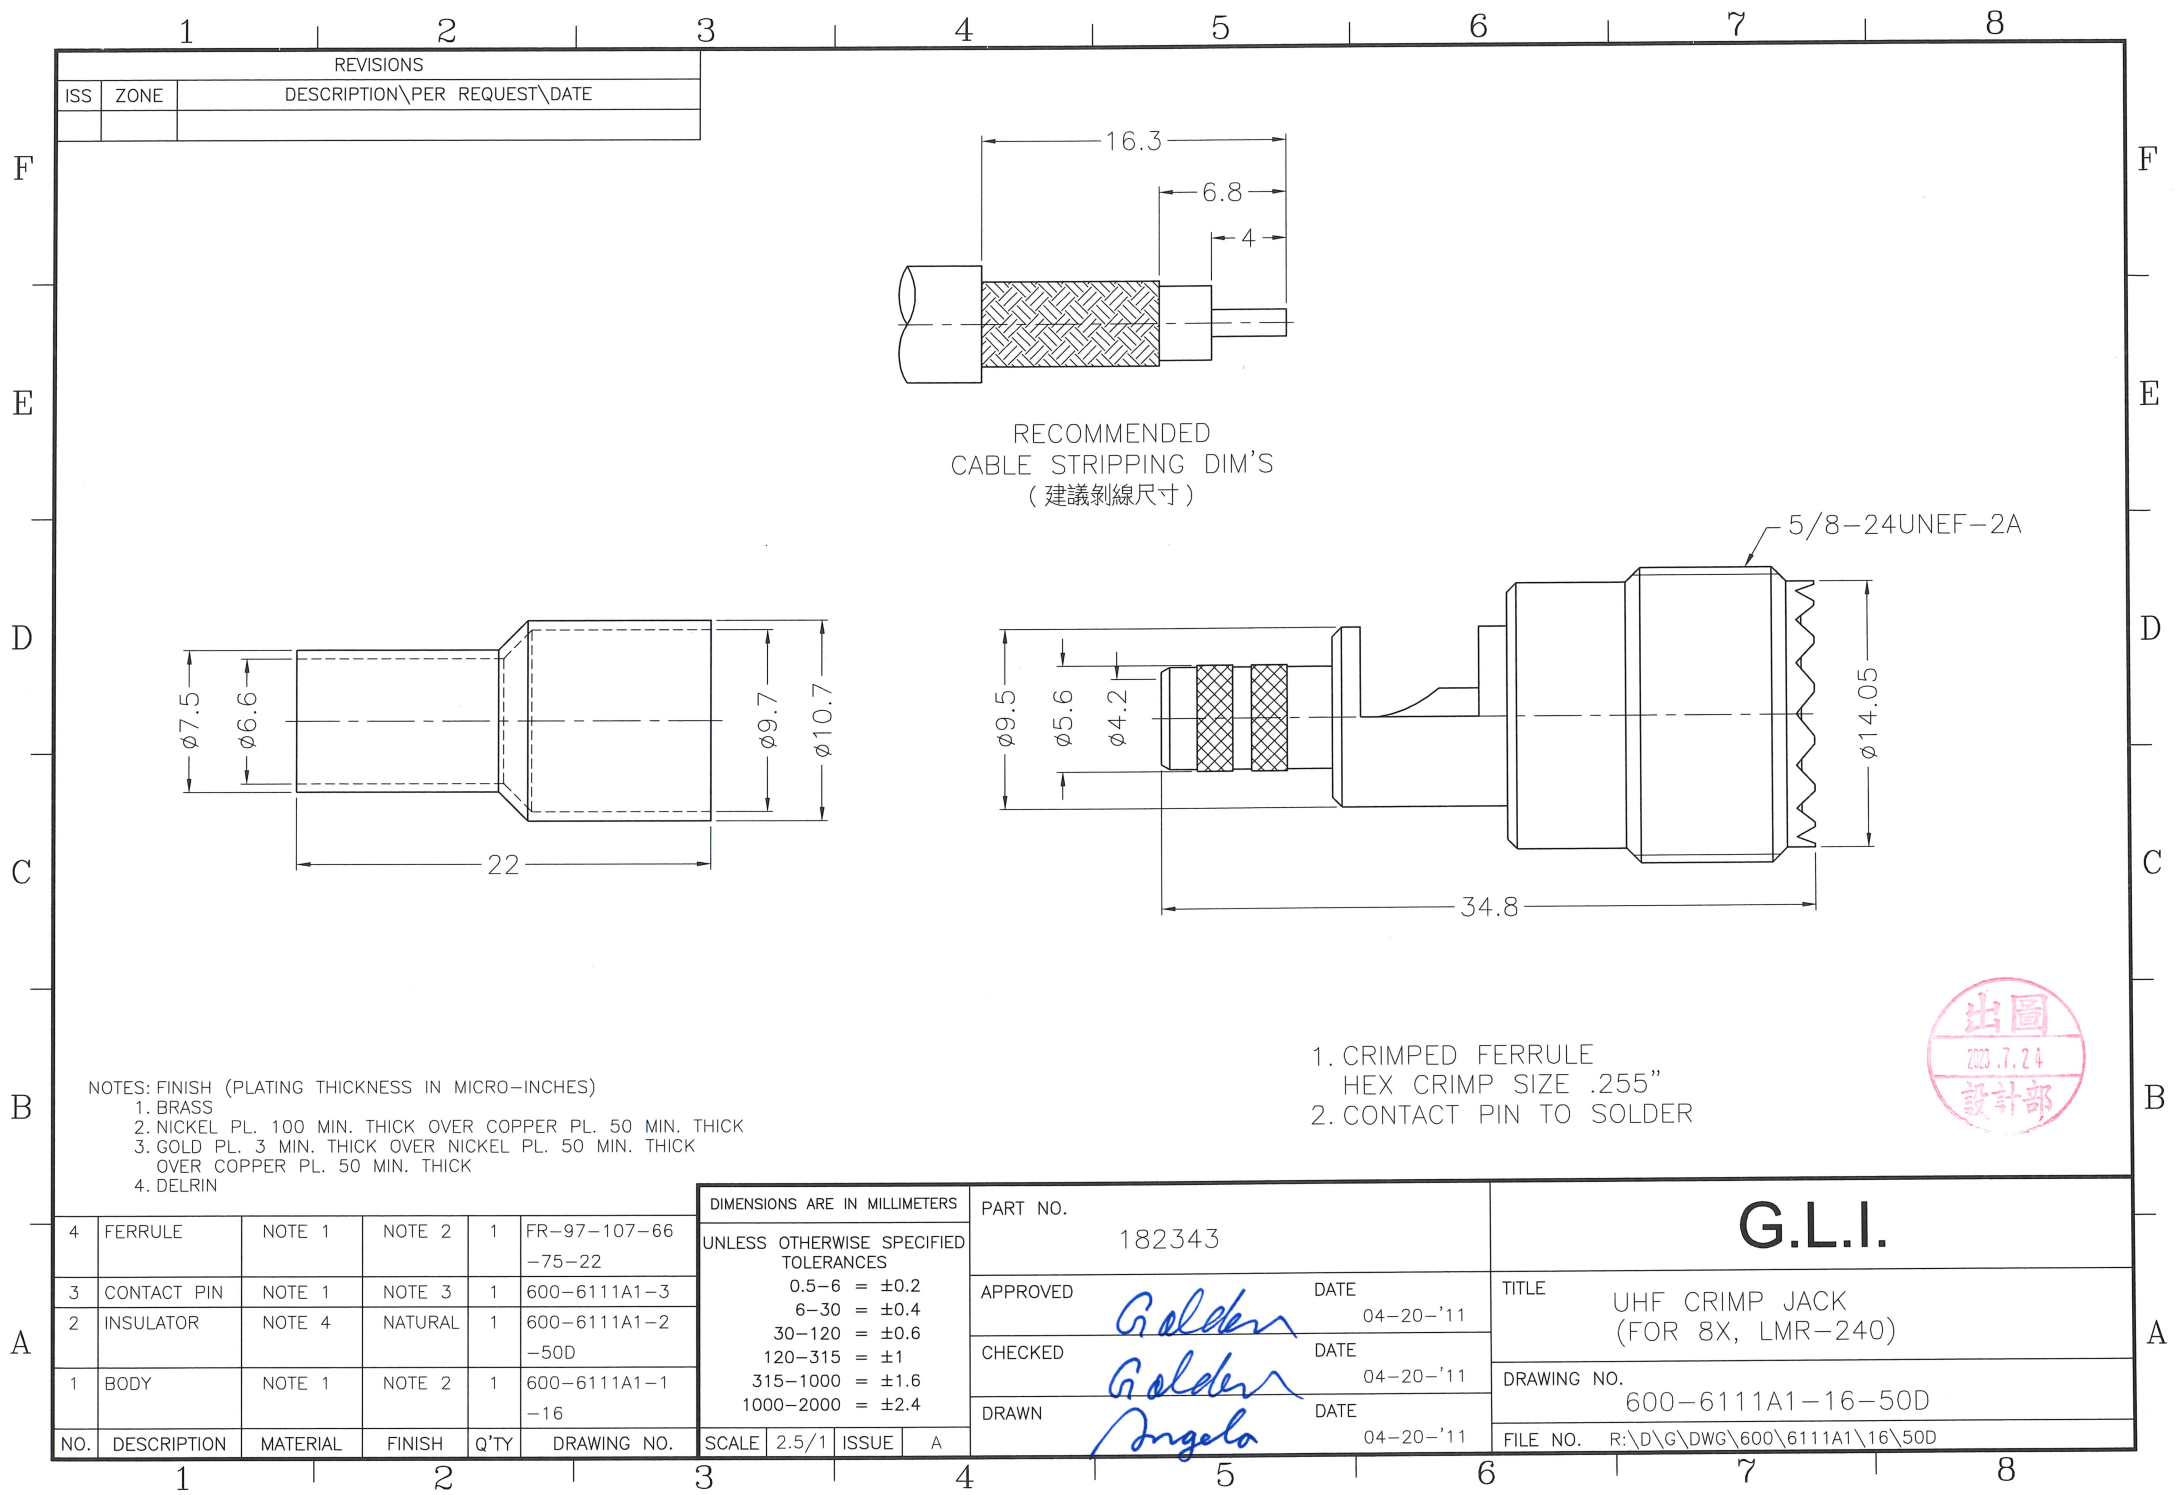

4. DELRIN						DIMENSIONS ARE IN MILLIMETERS				PART NO.		G.L.I.				
4	FERRULE	NOTE 1	NOTE 2	1	FR-97-107-66-75-22	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				182343						
3	CONTACT PIN	NOTE 1	NOTE 3	1	600-6111A1-3					APPROVED	Golden	DATE	04-20-'11	TITLE		UHF CRIMP JACK (FOR 8X, LMR-240)
2	INSULATOR	NOTE 4	NATURAL	1	600-6111A1-2-50D					CHECKED	Golden	DATE	04-20-'11	DRAWING NO.		600-6111A1-16-50D
1	BODY	NOTE 1	NOTE 2	1	600-6111A1-1-16					DRAWN	Angela	DATE	04-20-'11	FILE NO.		R:\D\G\DWG\600\6111A1\16\50D
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.					SCALE	2.5/1	ISSUE	A			