

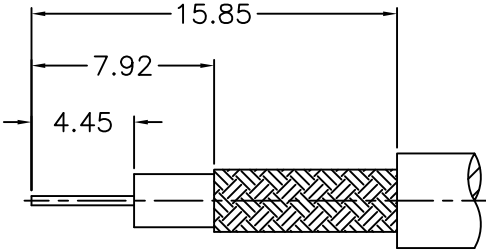
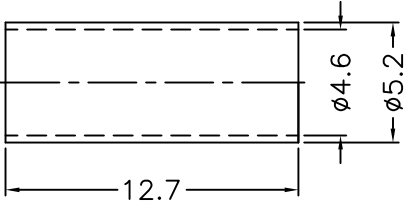



F
E
D
C
B
A

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	A-7	TITLE WAS CHANGED\N/A\06-06-'18

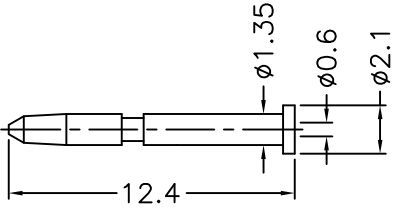

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

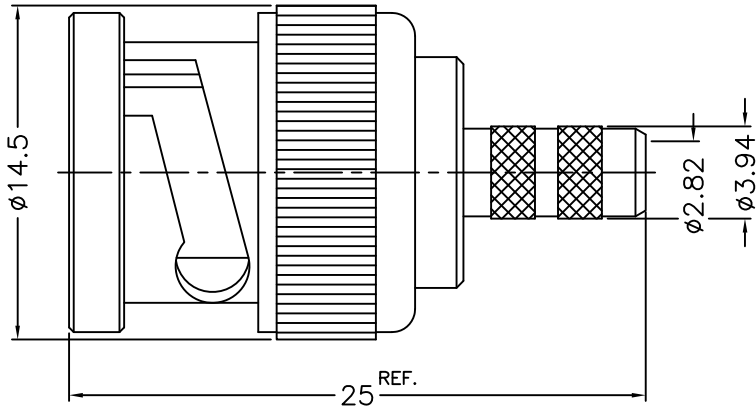

- 1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .041" OR .042"

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
5. TEFLON

RoHS COMPLIANT

11	FERRULE	NOTE 1	NOTE 2	1	FR-46-52-127
10	INSULATOR	NOTE 5	NATURAL	1	900-1121A21 -10T
9	CONTACT PIN	NOTE 1	NOTE 4	1	900-1121A11-9 -0.6
8	RING	NOTE 1	NOTE 2	1	900-1121A11-8
7	WASHER	NOTE 1	NOTE 2	1	WS-90-128-08
6	SPRING	SK5	NOTE 2	1	900-1000-6
5	GASKET	SILICONE	RED	1	GS-80-115-15 -S
4	OUTER CONTACT	NOTE 3	NOTE 2	1	900-1121A11-4
3	INSULATOR	NOTE 5	NATURAL	1	900-1121A11-3 -75T
2	BODY	NOTE 1	NOTE 2	1	900-1121A11-2 -26
1	SHELL	NOTE 1	NOTE 2	1	900-1121A11-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6 = ±0.2			
6-30 = ±0.4			
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			
SCALE	3/1	ISSUE	A1

PART NO.		G.L.I.	
APPROVED	DATE 06-06-'18	TITLE BNC CRIMP PLUG (FOR BELDEN 1855A/4855R CABLE)	
CHECKED	DATE 06-06-'18	DRAWING NO. 900-1121A21-26-75	
DRAWN	DATE 06-06-'18	FILE NO. R:\D\G\DWG\900\1121A21\26\75	

1 2 3 4 5 6 7 8