

F

E

D

C

B

A

F

E


D

C




B

A

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	A-2	CORRECTED NO.5'S DRAWING NO.\N/A\12-02-'10
A2	A-7	TITLE WAS CHANGED\N/A\06-15-'20

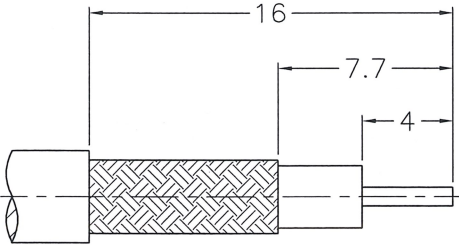

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

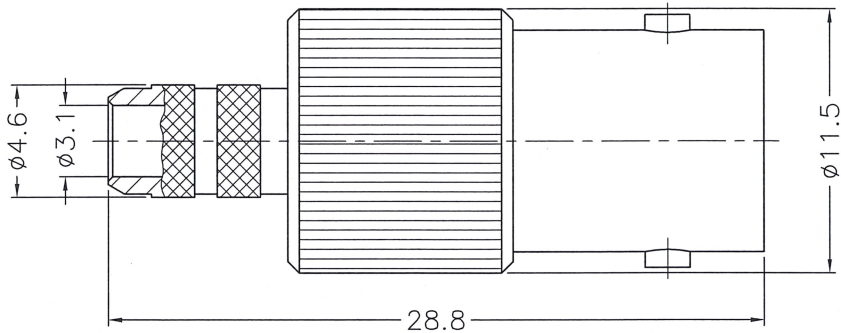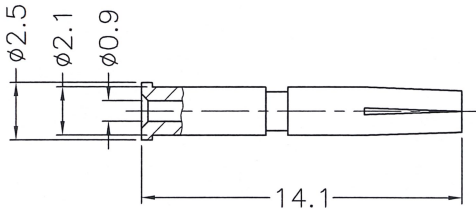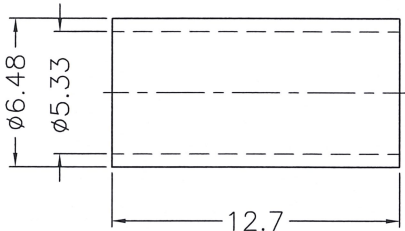

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3. PHOSPHOR BRONZE
- 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK

- 1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

RoHS COMPLIANT



DIMENSIONS ARE IN MILLIMETERS										PART NO.		G.L.I.	
UNLESS OTHERWISE SPECIFIED TOLERANCES										B6121B1-ND3G-58U-50		TITLE	
5	FERRULE	COPPER	NOTE 2							APPROVED	DATE	BNC CRIMP JACK	
4	CONTACT PIN	NOTE 3	NOTE 4								06-15-'20	(FOR RG-58/U CABLE)	
3	INSULATOR	POM	NATURAL							CHECKED	DATE	DRAWING NO.	
2	LOCK RING	IRON	NOTE 2								06-15-'20	900-6121B1-06-50D	
1	BODY	NOTE 1	NOTE 2							DRAWN	DATE	ITEM NO. R:\D\DWG\900\6121B1\06\50D-A2	
											06-15-'20		

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
-----	-------------	----------	--------	------	-------------