


F
E
D
C
B
A



REVISIONS				
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE		

1. IMPEDANCE : 75ohm
2. FREQUENCY RANGE : DC-12GHz
3. RETURN LOSS (VSWR) : -20dB (<1.22)

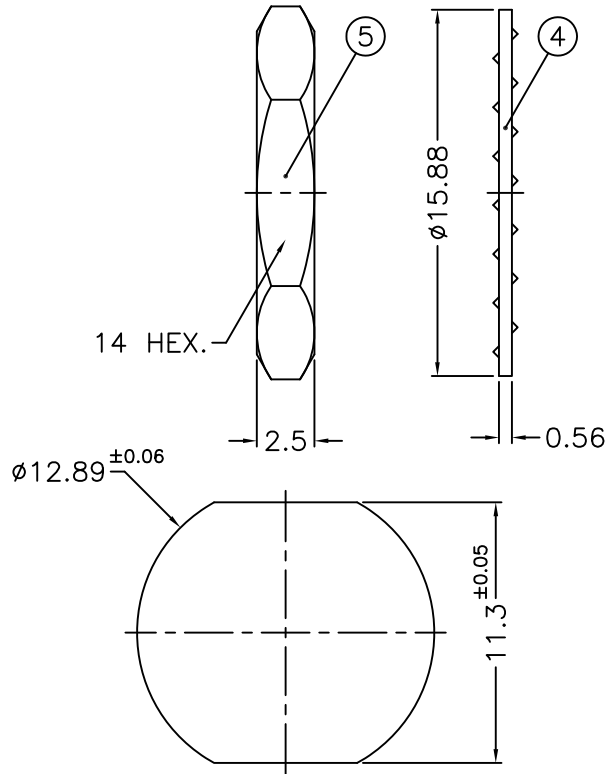

RECOMMENDED MOUNTING
HOLE DIMENSIONS
(建議架設孔)

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
5. PHOSPHOR BRONZE
6. TEFLON

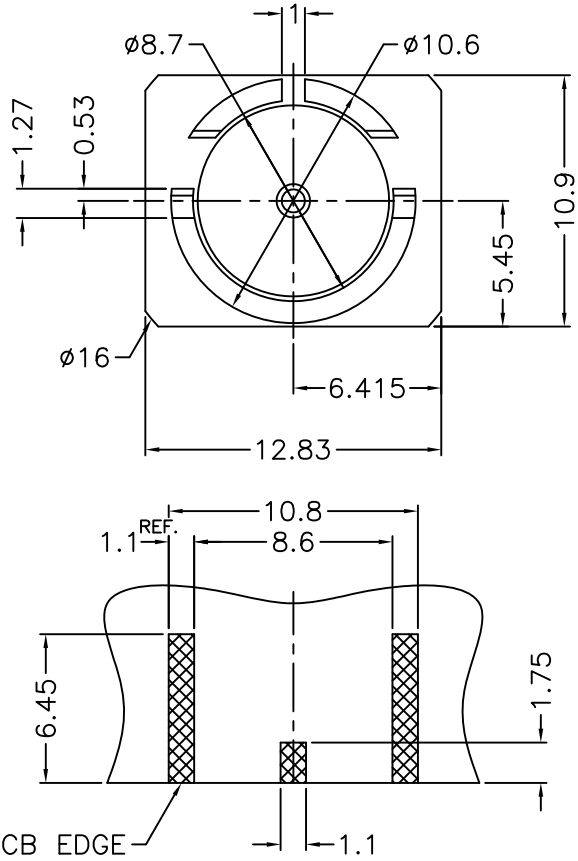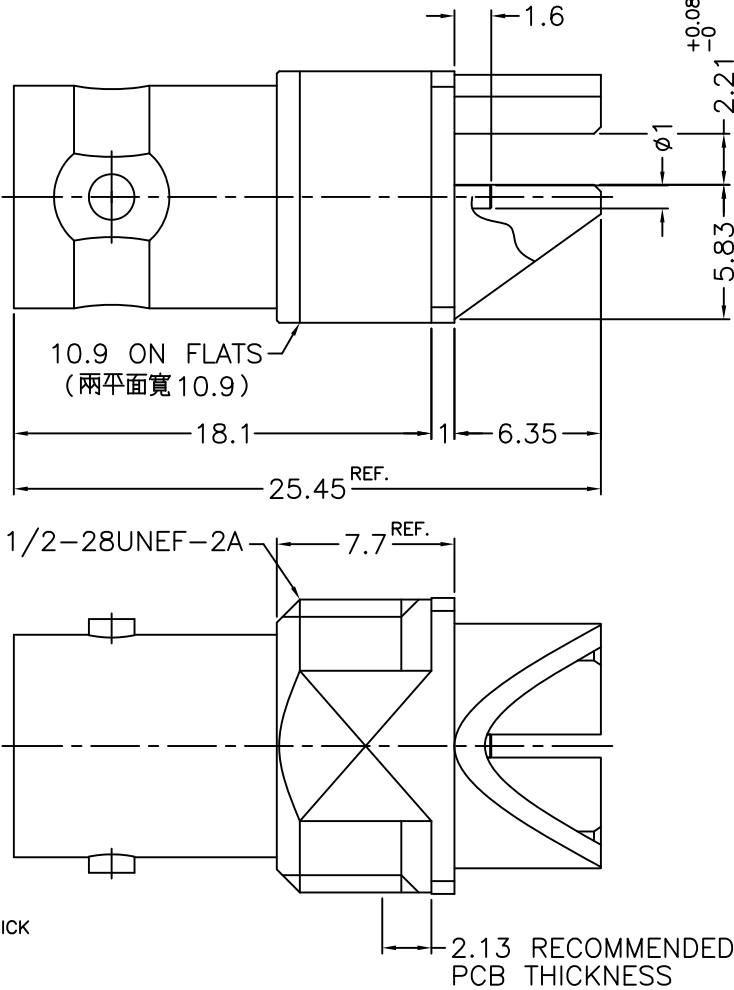

RECOMMENDED PCB
LAYOUT DIMENSIONS

RoHS COMPLIANT

5	HEX NUT	NOTE 1	NOTE 2	1	HN-14-1228-25
4	LOCK WASHER	NOTE 5	NOTE 2	1	LW-13-16-05PB
3	CONTACT PIN	NOTE 3	NOTE 4	1	900-6351S20-3
2	INSULATOR	NOTE 6	NATURAL	1	900-6351S20-2 -75T
1	BODY	NOTE 1	NOTE 2	1	900-6351S21-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6 = ±0.2			
6-30 = ±0.4			
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			
SCALE	3/1	ISSUE	1

PART NO.	
APPROVED	DATE 08-01-'18
CHECKED	DATE 08-01-'18
DRAWN BRIAN	DATE 08-01-'18

G.L.I.	
TITLE	BNC END LAUNCH RECEPT. JACK
DRAWING NO.	900-6351S21-75
ITEM NO.	R:\D\G\DWG\900\6351S21\75