REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A	ALL	SMPM-6181A1-33-50 WAS SPC-6181A1-33-50 \RD-DM051005001\10-05-'16

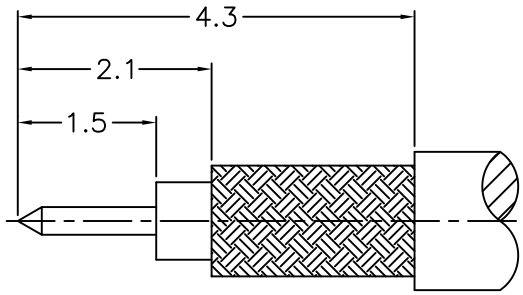

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

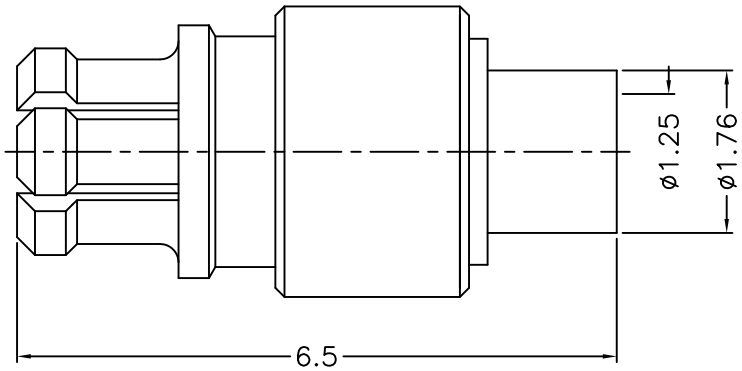

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON

RoHS COMPLIANT

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
4	BARREL	NOTE 1	NOTE 2	1	SMPM-6181A1-4-33
3	CONTACT PIN	NOTE 3	NOTE 4	1	SMPM-6181A1-3-0.35
2	INSULATOR	NOTE 5	NATURAL	1	SMPM-6181A1-2-50T
1	BODY	NOTE 3	NOTE 2	1	SMPM-6181A1-1

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 12/1 | ISSUE A

PART NO.

APPROVED DATE 10-05-'16

CHECKED DATE 10-05-'16

DRAWN DATE 10-05-'16

G.L.I.

TITLE
MINI-SMP DIRECT SOLDER PLUG
(FOR .047", FLEXIFORM 151 FJ)

DRAWING NO.
SMPM-6181A1-33-50

FILE NO. R:\D\G\DWG\SMPM\6181A1\33\50